

HSF

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+33%GF UL94V-0

Ordering Information

2321-1 XX M XX CUN X X


No. of Pins per Row: 02-50Pin

Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold

Packing:
 T=Tube
 P=Tube+CAP
 R=Tape&Reel+CAP

Series No.
 3=Type 1
 4=Type 2

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

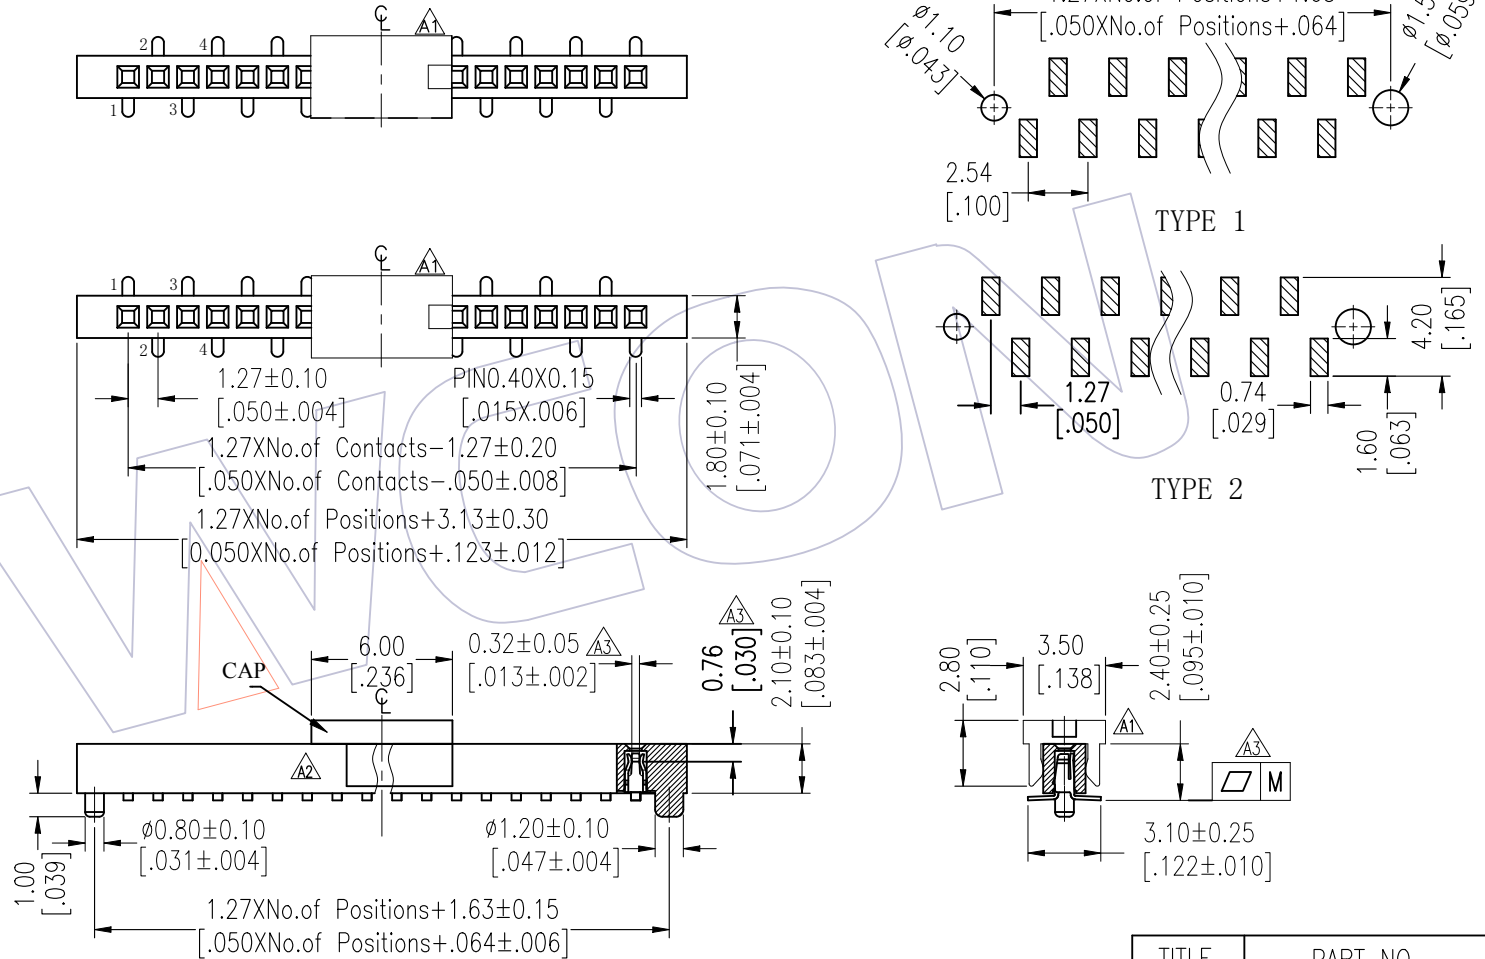

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

A3	Pin(Per Row)	2-15P	16-30P	31-50P
M		0.10	0.15	0.18

TITLE	PART NO.
TYPE 1	2321-1XXMXXCUNX3
TYPE 2	2321-1XXMXXCUNX4

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DATE	SCALE	FIT	PART NO.
A3	2023/02/03	ADD Flatness	A3	XSR	2023/02/03	mm		SEE TABLE
A2	2017/04/14	MODIFY CAP	A2	X.X ±0.40				TITLE:
A1	2016/12/15	MODIFY CAP	A1	X.XX ±0.25				1.27mm SINGLE FEMALE HEADER SMT
A0	2012/07/05	NEW		X.XXX ±0.15				H=2.10 WITH DIFFERENT POST
				Angle ± 3°	APPROVE			Customer NO.
				DIM TOL	DATE			

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com