



HSF

NOTES:
 Rated Current: 0.75AMP.
 Contact Resistance: 30mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN)



Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK

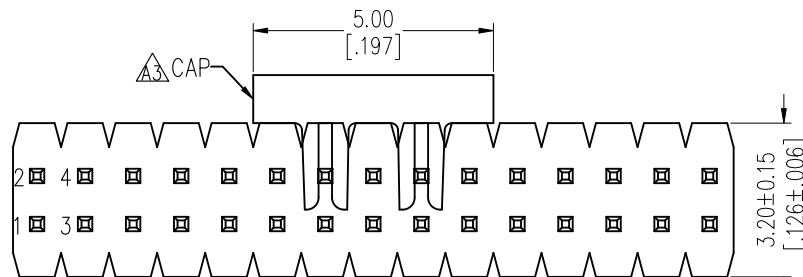


Odd Numbers

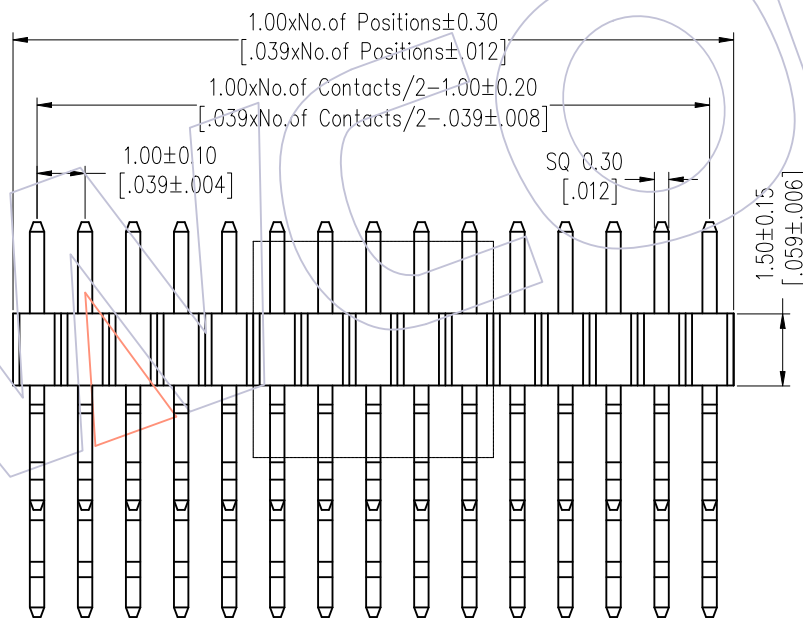

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

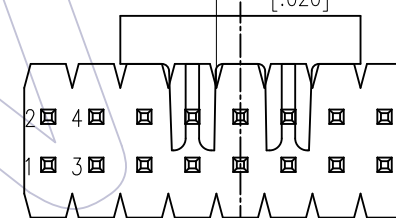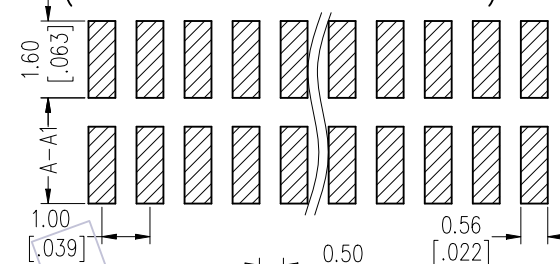

Dual Numbers

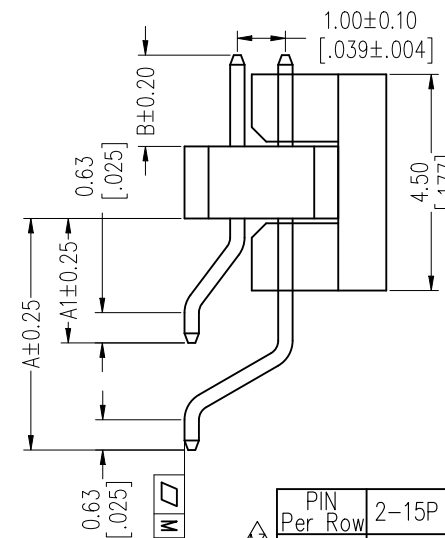

Ordering Information

1515-12 XX XX Z 062 C R XX

No. of Pins Contact Plating Pin Length(Short) Insulator Packing Series No.
 Per Row: 01~50 G0=Gold Flash L=A1+B+1.8 C=PA9T A=Tray 01~99
 G3=10u"Gold Standard: 062=6.2 T=Tube
 G4=15u"Gold P=Tube+CAP
 G5=30u"Gold R=Tape&Reel+CAP
 SN=Tin
 SM=Matte Tin

Item	Pin Length	A1	A	B
Standard	6.2	2.59	4.82	1.90
Alternate				

A3	2018/09/07	MODIFY	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/05	MODIFY PART NO.	x.x ±0.40	Ding	2018/09/07	UNIT	mm [inch]	1515-12XXXXZXXXCXXX
A1	2012/11/21	Modify the material	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.00 Pin Header, DUAL ROW, R/A&SMT, H=1.5
A0	2012/03/01	NEW	x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
REV	DATE	MODIFICATION DESCRIPTION	Angle ± 3°	DIM TOL		PROJ.		

PIN Per Row	2-15P	16-30P	31-50P
M	0.10	0.15	0.25

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com