
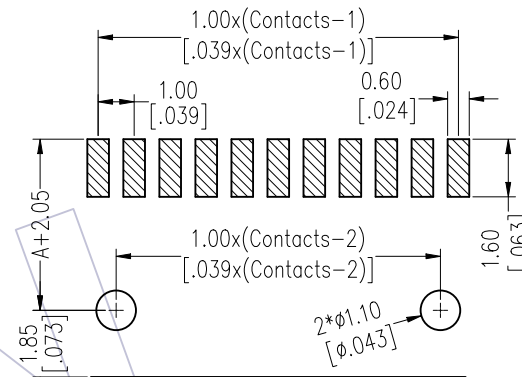


HSF

NOTES:
 Rated Current: 0.75AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

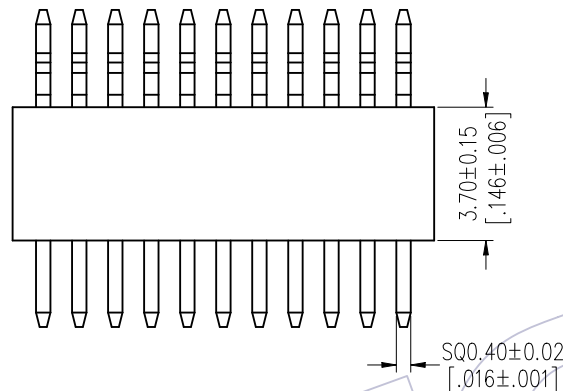


Ordering Information

1537-11 XX XX Z 091 C R XX

No. of Pins	Contact Plating	Pin Length	Insulator	Packing	Series No.
02~50	G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold SN=Tin SM=Matte Tin	L=A+B+4.0 Std:091=9.1	C=PA9T	A=Tray R=Tape&Reel	01~99

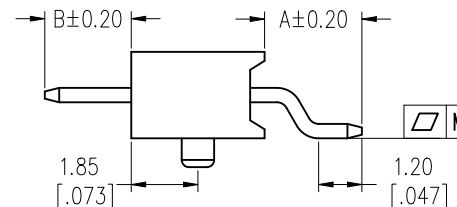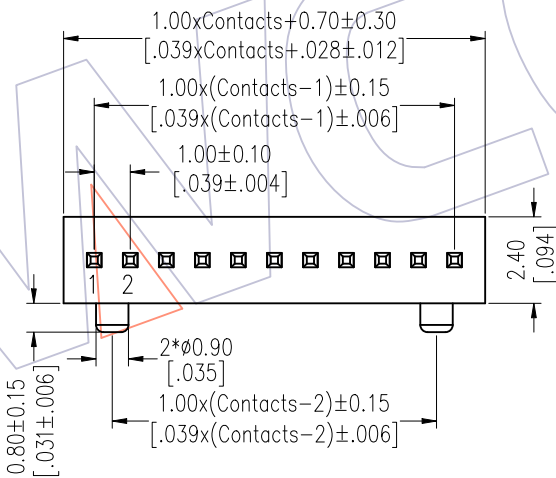

TYPE-2: W/T POST



TYPE-1: W/O POST

Item	Pin Length	A	B
Standard	9.1	2.70	2.40
Alternate			

No. of Pins	M
≤15	0.12
>15	0.15

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.x ±0.40	William Chen	2018/01/05	UNIT	mm	1537-11XXXXZXXXCXXX
x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE:
x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	1.00 Pin Header, SINGLE ROW, R/A&SMT, H=3.7
Angle ± 3°			PROJ.		Customer NO.
DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com