
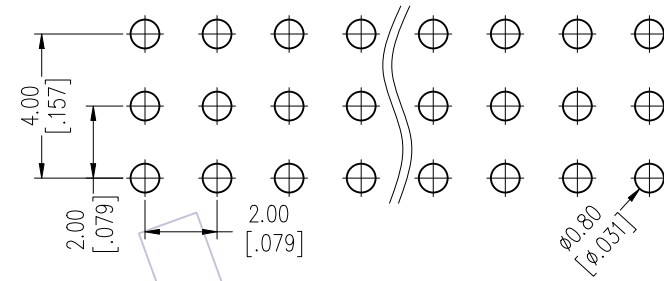


HSF

NOTES:
 Rated Current: 2.0AMP.
 Contact Resistance: 20mΩ Max.
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min.
 Operation Temperature: -40°C to +125°C(GOLD)
 -40°C to +105°C(TIN) $\Delta 2$
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

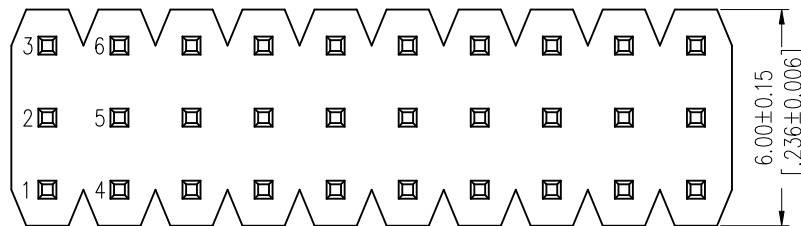

Ordering Information

1215-13 XX XX S XXX C 0 XX $\Delta 1$

$\Delta 1$ No. of Pins Contact Plating Pin Length Insulator Packing Series No.
 Per Row: 03~40 G0=Gold Flash L=A+B+1.5 Material 0=PE Bag 01~99
 G3=10u"Gold Standard: 083=8.3 C=PA9T T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin
 SM=Matte Tin

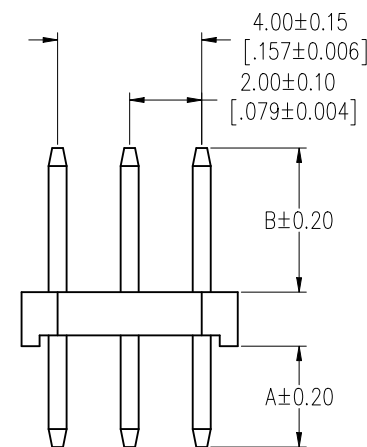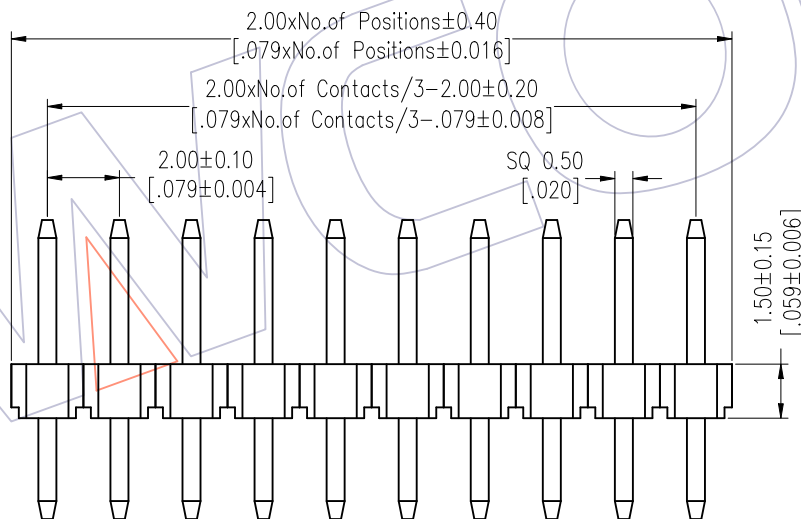

Item	Pin Length	A	B	Mating
Standard	8.30	2.80	4.00	2263
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/11	Modify Pin 03~40P	$\Delta 3$	Drawing	OPERATION	2020/06/11	UNIT	mm	1215-13XXXXSXXXCOXX $\Delta 1$
A2	2019/02/28	Modify	$\Delta 2$	Dwg	X.X ±0.40	DATE	SIZE	A4	TITLE:
A1	2018/01/18	Modify P/N	$\Delta 1$	-----	X.XX ±0.25	CHECK	SHEET	1/1	PH2.00 THREE ROW 180° H=1.5
A0	2012/04/18	NEW	-----	-----	X.XXX ±0.15	APPROVE	PROJ.		Customer NO.
				Angle ± 3°	± DIM TOL	DATE			

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: salesks@wcon.com