
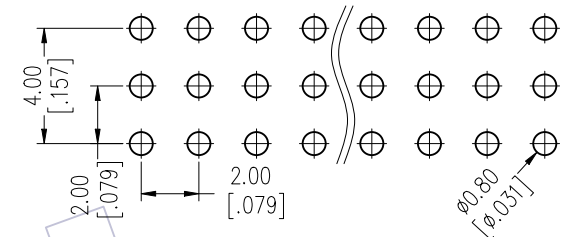


# HSF

NOTES:  
 Rated Current: 2.0AMP.  
 Contact Resistance: 20mΩ Max.  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min.  
 Operation Temperature: -40°C to +125°C(GOLD)  
 -40°C to +105°C(TIN)  $\Delta 2$

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: PA9T+33%G.F UL94V-0 BK



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE  $\pm 0.05$ )

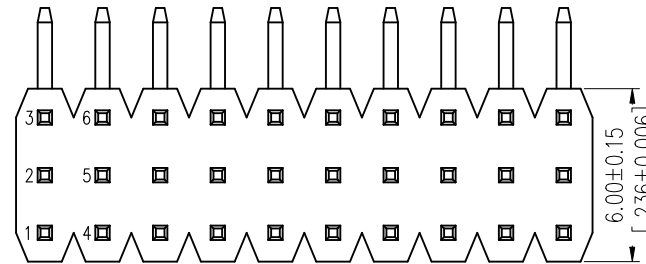

## Ordering Information

1215-23 XX XX R XXX C 0 XX  $\Delta 3$

$\Delta 3$  No. of Pins Per Row: 03~40  
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin  
 Pin Length(Short) L=A+B+C+D+1.0  
 Insulator Material C=PA9T  
 Packing 0=PE Bag, T=Tube  
 Series No. 01~99

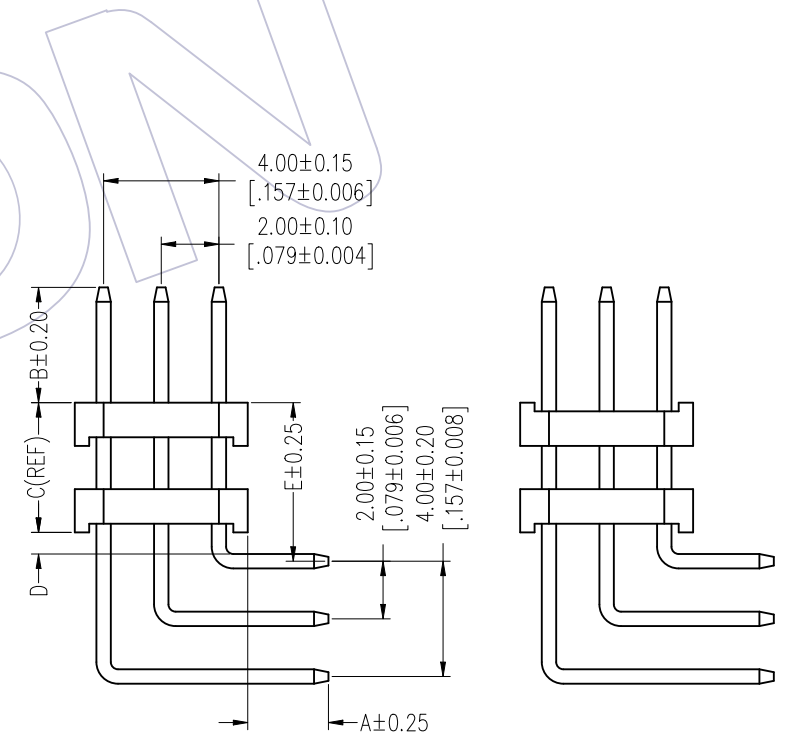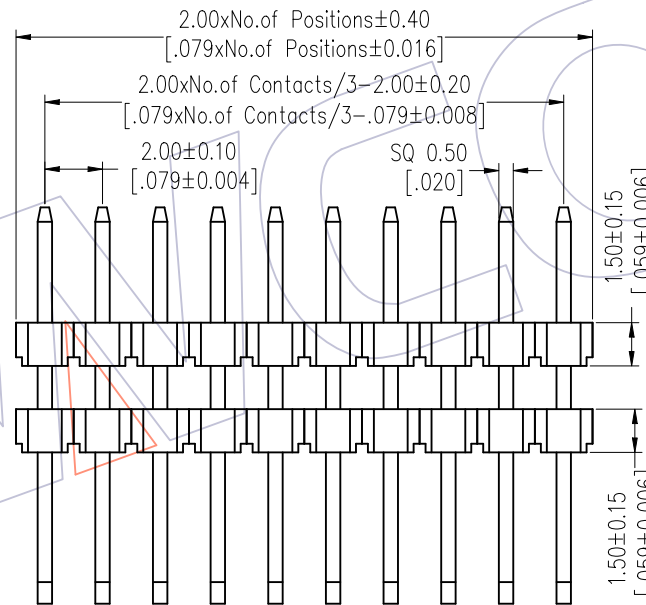

TYPE 1 TYPE 2

Item	Pin Length	A	D	B	E	Mating
Standard	---	2.80	0.75	4.00	---	2263
Alternate						

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A3	2020/06/12	Modify Pin 03~40P	$\Delta 3$ Du Ying	OPERATION	Du Ying	2020/06/12	UNIT	mm	1215-23XXXXRXXXCOXX $\Delta 3$
A2	2019/03/04	Modify	$\Delta 2$ Ding	x.X ±0.40	CHECK	DATE	SIZE	A4	TITLE: PH2.00 THREE ROW DOUBLE PLASTIC 90° H=1.5 CONCAVE BENDING
A1	2018/01/18	Modify P/N	$\Delta 1$ -----	x.XX ±0.25	APPROVE	DATE	SHEET	1/1	Customer NO.
A0	2012/04/18	NEW	-----	x.XXX ±0.15			PROJ.		
				Angle ± 3°					
				DIM TOL					

**WCON**  
 Http: www.wcon.com  
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com