

HSF



NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK




Ordering Information

1115-11 XX XX M XXX C R XX Δ

No. of Pins 02-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length $L=B+D+1.5+\frac{W}{2}$ Standard:106=10.6	Insulator Material C=PA9T	Packing T=Tube P=Tube+CAP R=Tape & Reel+CAP	Series No. 01-99
----------------------	---	--	------------------------------	--	---------------------

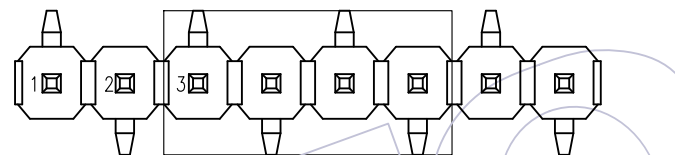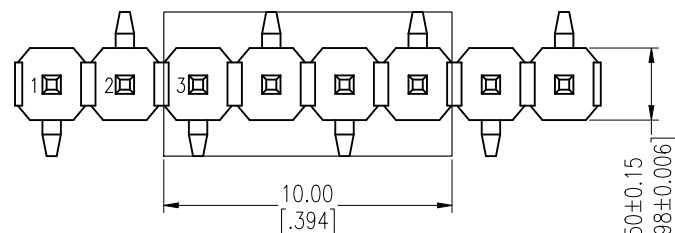

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

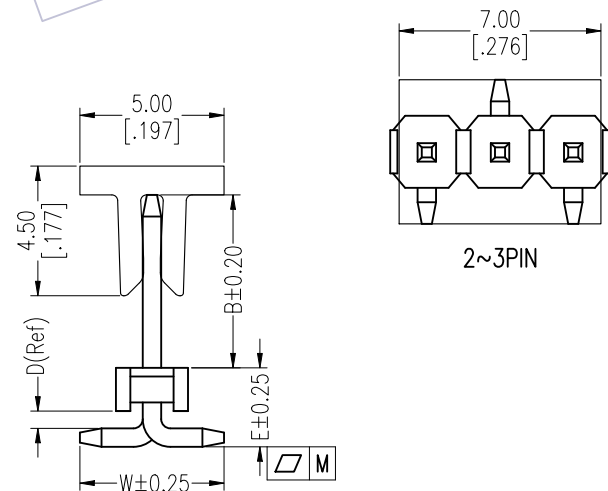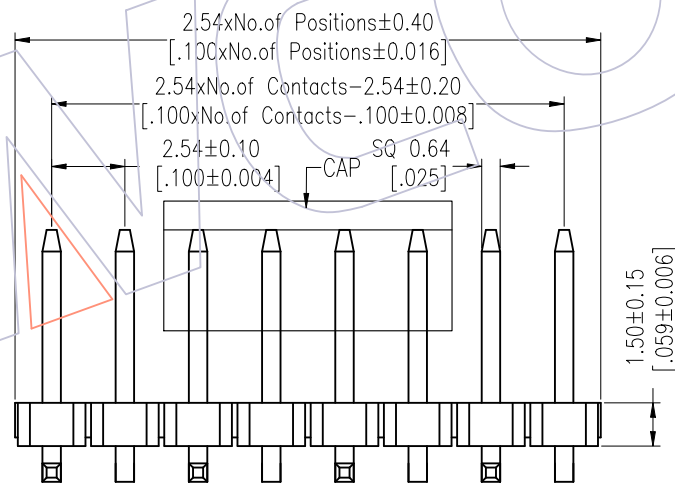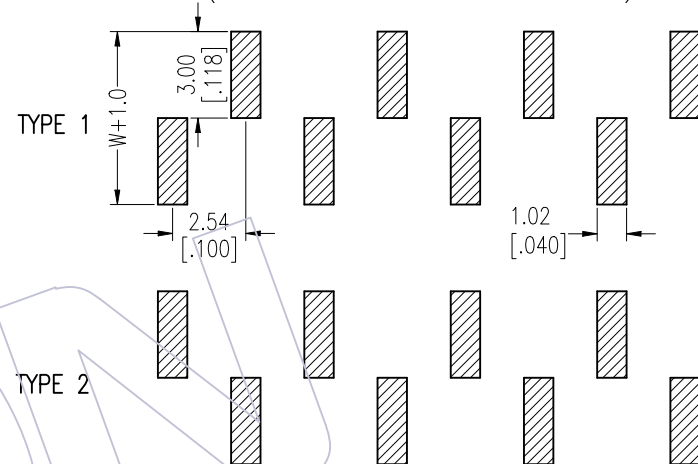

Item	Pin Length	W	E	B	Mating
Standard	10.60	5.00	2.74	6.00	2171 2185
Alternate					

PIN(PerRow)	2-15P	16-25P	26-40P	Δ
M	0.10	0.15	0.20	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2023/02/02	Add Flatness	DuYing	x.X ±0.40	DuYing	2023/02/02	UNIT mm		1115-11XXXXMXXXCRRX
A1	2018/01/22	Modify P/N Δ	Ruipeng	x.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: PH2.54 SINGLE ROW SMT H=1.5
A0	2012/05/02	NEW	-----	x.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ. ϕ		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com