
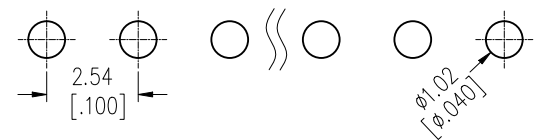


HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

NOTES:
Rated Current: 3.0AMP.
Contact Resistance: 20mΩ Max.
Withstand Voltage: 1000V AC/DC
Insulation Resistance: 1000MΩ Min.
Operation Temperature: -40°C to +105°C



Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA9T+33%G.F UL94V-0 BK

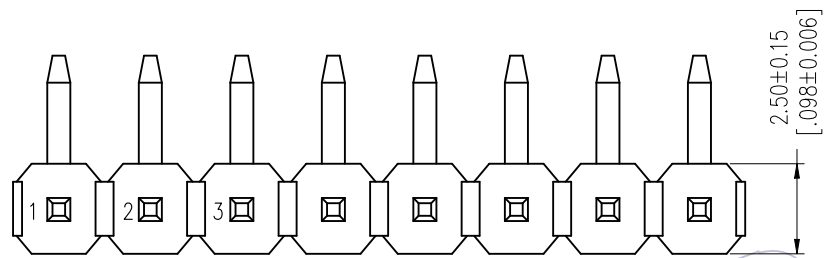

Ordering Information

1115-11 XX XX R XXX C X XX

- No. of Pins: 02-40
- Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin, SM=Matte Tin
- Pin Length: L=A+B+D+2.7, Standard: 129=12.9
- Insulator Material: C=PA9T
- Packing: 0=PE Bag, T=Tube
- Series No.: 01, ..., 99

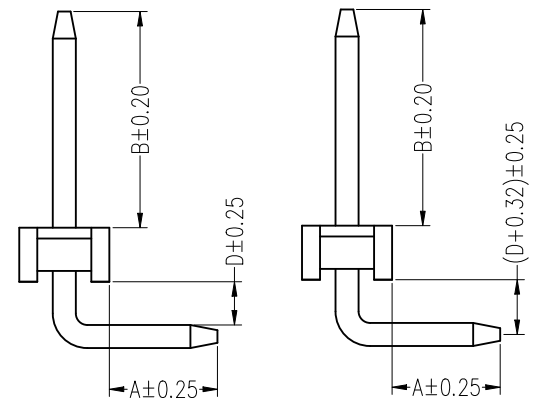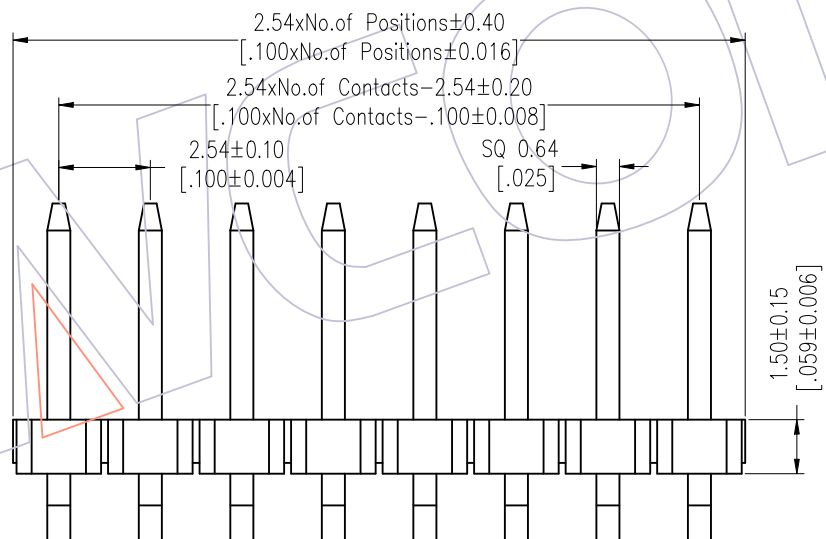

变更前标注

变更后标注

Item	Pin Length	A	D	B	Mating
Standard	12.90	3.00	1.20	6.00	2171 2185
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.x ±0.40	Ruipeng	2018/01/05	UNIT mm		1115-11XXXXRXXXCXXX
x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE:
x.xxx ±0.15	APPROVE	DATE	SHEET 1/1		PH2. 54 SINGLE ROW 90° H=1.5 CONCAVE BENDING
Angle ± 3°			PROJ.		Customer NO.
DIM TOL					

WCON
Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
Tel: +86 769 85358920 Tel: +86 512 57468408
Fax: +86 769 85358915 Fax: +86 512 57468468
E-mail: sales@wcon.com E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/05	Modify P/N	
A0	2012/05/02	NEW	-----