


HSF




NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0 BK

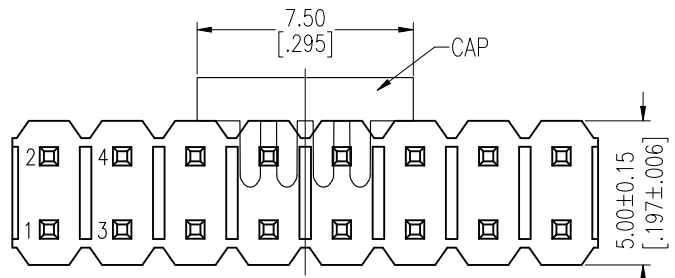

Dual Numbers

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

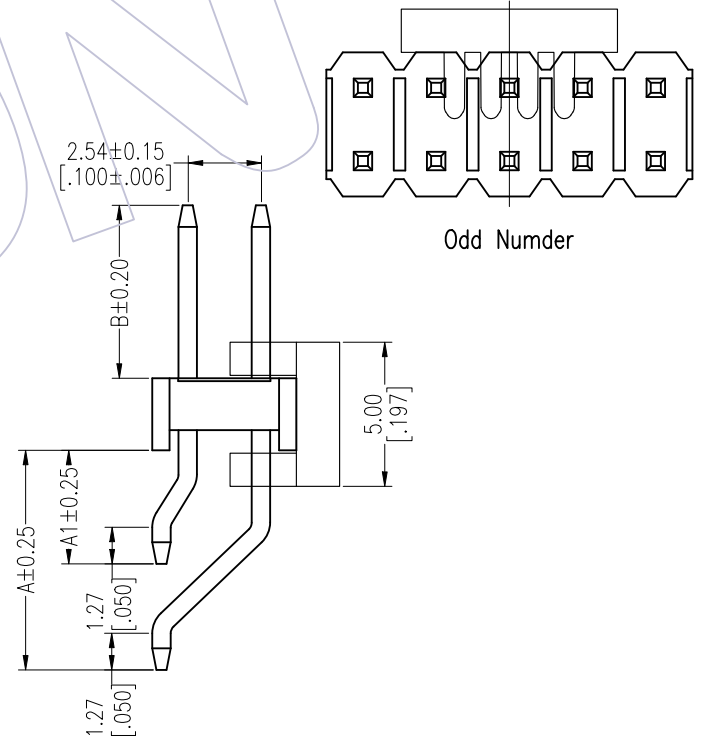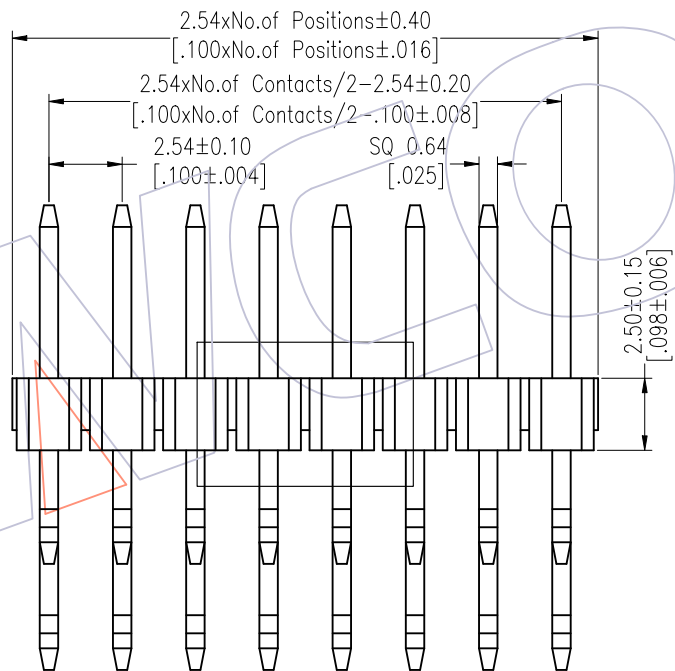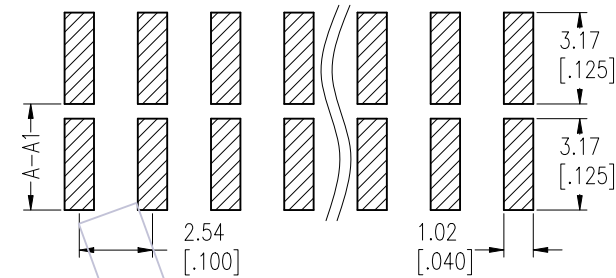

Odd Number

Ordering Information

1125-12 XX XX Z XXX C R XX $\triangle A_2$

No. of Pins Per Row:02-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length(Short) L=A1+B+2.7 Standard:126=12.6	Insulator Material C=PA9T	Packing T=Tube P=Tube+CAP R=Tape & Reel+CAP	Series No. 01-99
------------------------------	---	--	---------------------------------	---	---------------------

Item	Pin Length	A1	A	B	Mating
Standard	12.6/17.3	3.94	7.62	6.00	2171 2185
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A2	2018/01/22	Modify P/N	$\triangle A_2$	X.X ±0.40	Ruipeng	2018/01/22	UNIT	mm [inch]	1125-12XXXXZXXCRXX
A1	2017/09/22	Modify Pin Length	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: PH2.54 DUAL ROW R/A&SMT H=2.5
A0	2012/05/28	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com