



HSF

NOTES:
 Rated Current:1.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C


Contact Material:Phosphor Bronze
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:PA9T+33%G.F UL94V-0




TYPE 1

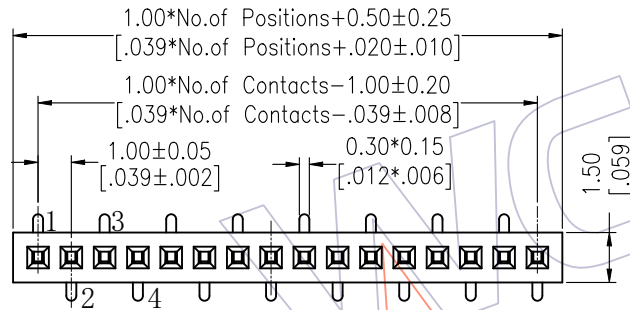


TYPE 2

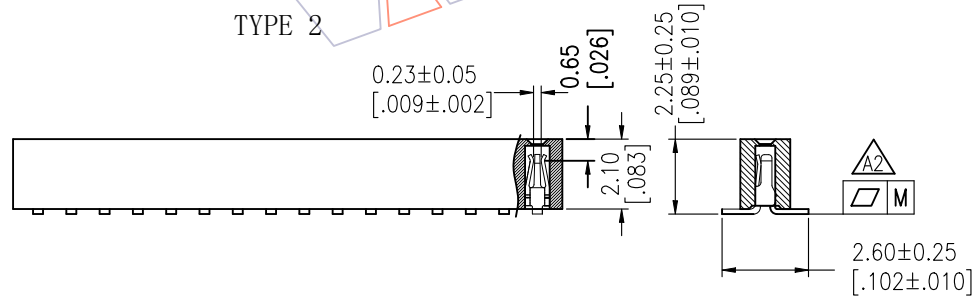

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

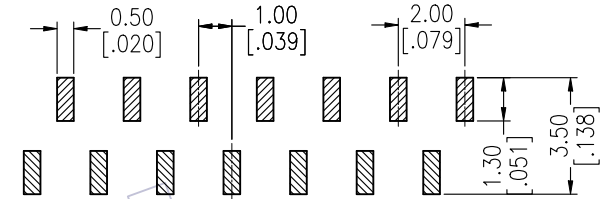

TYPE 1

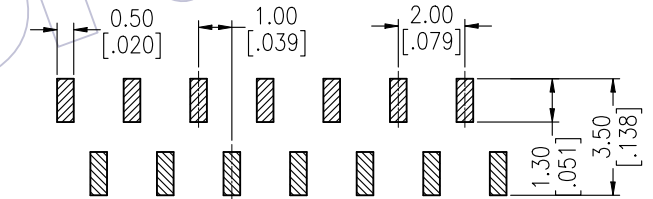

TYPE 2

Ordering Information

2521-1 XX M XX CUN X X

No. of Pins per Row: 02-40Pin

Contact Plating:
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 SN=Tin

Packing:
 T=Tube
 R=Tape&Reel

Series No.
 1=Type 1
 2=Type 2

Pin(Per Row)	2-15P	16-30P	31-40P
M	0.10	0.12	0.18

TITLE	PART NO.
TYPE 1	2521-1XXMXXCUN1/3.....
TYPE 2	2521-1XXMXXCUN2/4.....

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2023/02/03	Add Flatness	XSR	X.X ±0.40	XSR	2023/02/03	UNIT mm		2521-1XXMXXCUNXX
A1	2015/01/12	Modify	A1	X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 1.00mm Female Header
A0	2014/12/25	NEW		X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Single Row 180°SMT Type
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--