



# HSF

**NOTES:**

Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au over Ni  
 Insulator Material: PA9T+33%GF UL94V-0

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

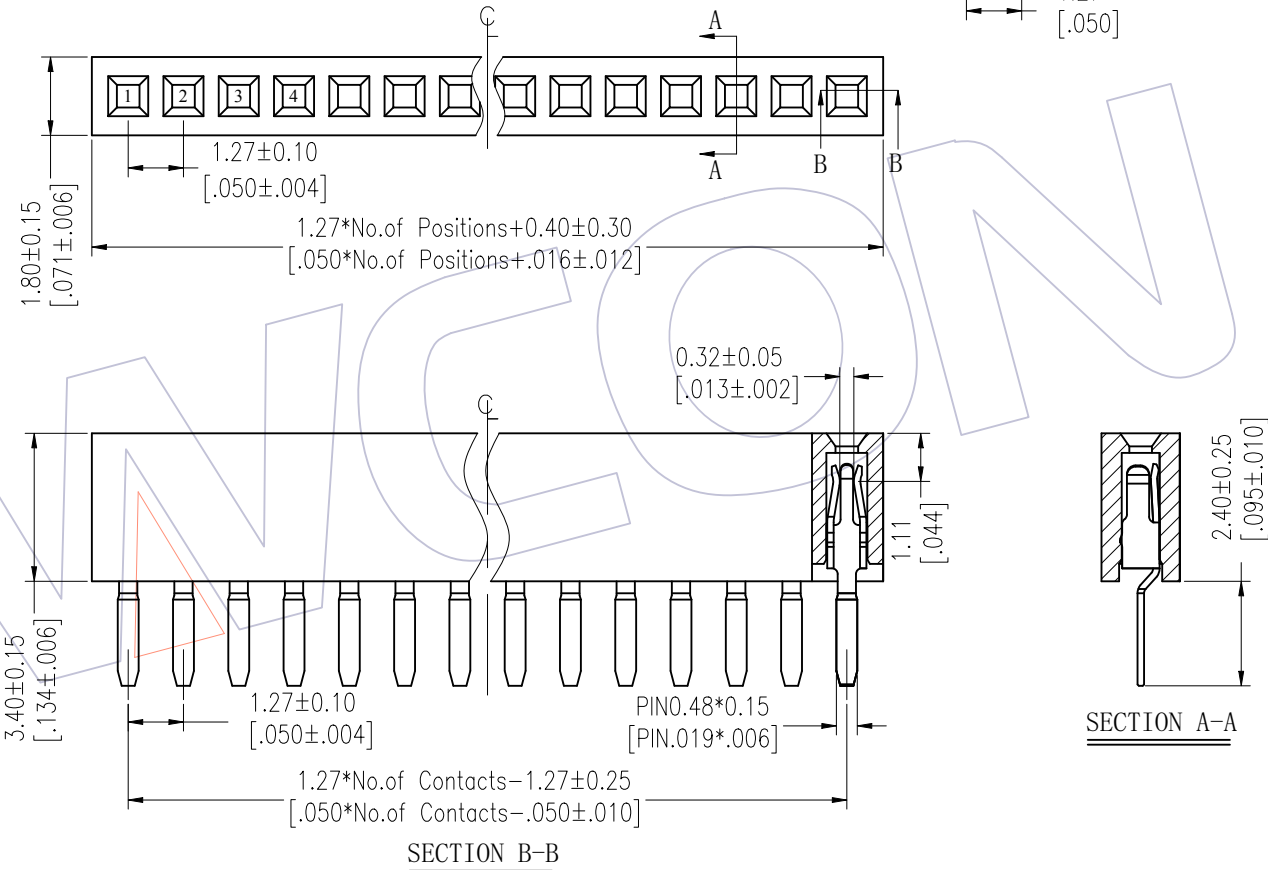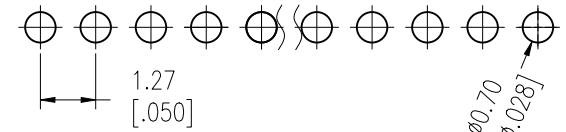

## Ordering Information

2334-1 XX S XX CUN T 1

No. of Pins per Row: 02-50Pin

Contact Plating:  
 G0=Gold Flash  
 G1=3u"Gold  
 G3=10u"Gold  
 G4=15u"Gold  
 G5=30u"Gold

Packing:  
 T=Tube

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/07/06	NEW	-----	x.x ±0.40	JYHuang	2012/07/06	UNIT mm		2334-1XXSXXCUNT1
				x.xx ±0.25	CHECK	DATE	SIZE A4		TITLE: 1.27mm SINGLE FEMALE HEADER 180° H=3.40
				x.xxx ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3°			PROJ.		
				DIM TOL					

SECTION A-A

SECTION B-B

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915 Fax: +86 512 57468468  
 E-mail: sales@wcon.com E-mail: salesks@wcon.com