HSF

NOTES:
Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Phosphor Bronze
Contact plating:Au Or Sn over Ni
Insulator Material:PA9T+30%G.F UL94V−0

Ordering Information

2243-1 XX W XX CUN X X

- XX: No.of Pins per Row: 02~40Pin
- XX: Contact Plating:
  G0=Gold Flash
  G3=10μ"Gold
  G4=15μ"Gold
  G5=30μ"Gold
  S0=Gold Flash/Tin
  S3=10μ"Gold/Tin
  S4=15μ"Gold/Tin
  S5=30μ"Gold/Tin
  SN=Tin
  SM=Matte Tin
- X: Packing:
  A=Tray
  T=Tube
- X: Series No.
  1=Type 1
  2=Type 2

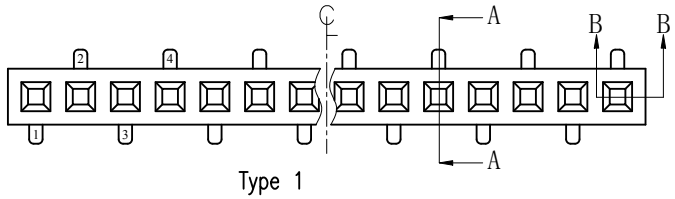

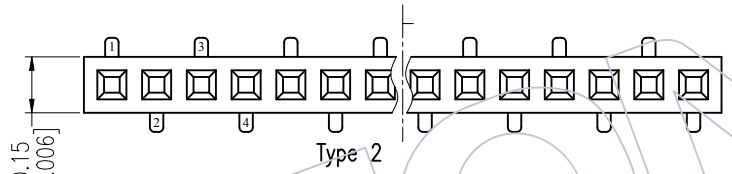

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

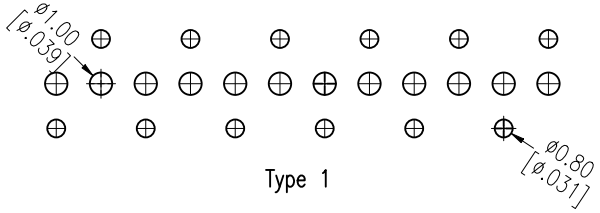

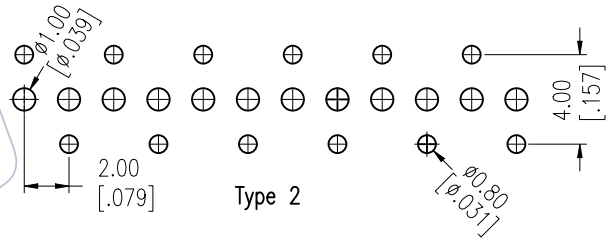

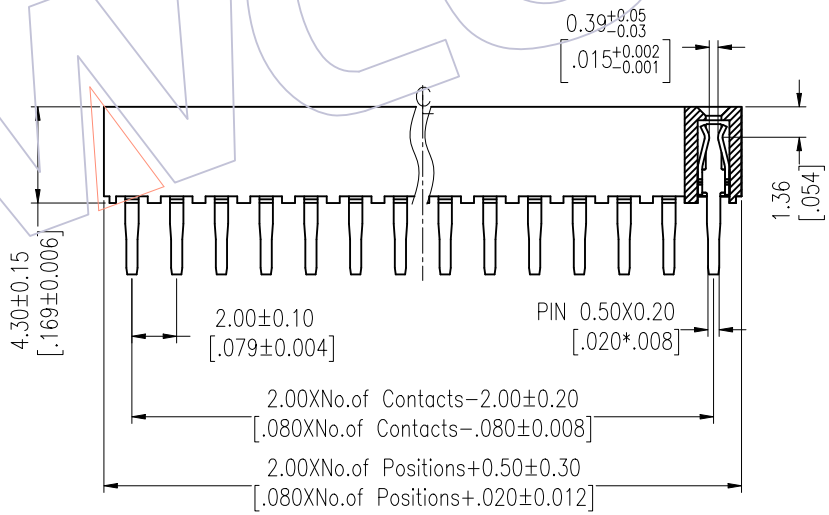

SECTION B−B

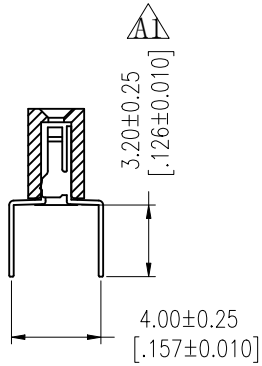

SECTION A−A

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

TITLE	PART NO.
TYPE 1	2243−1XXWXXCUNX1
TYPE 2	2243−1XXWXXCUNX2

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2015/09/14	Modify 3.00 to 3.20	A1
A0	2012/07/13	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	DATE
Allen	2015/09/14
CHECK	DATE
APPROVE	DATE

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 2243−1XXWXXCUNXX

TITLE: FH2.00mm SINGLE ROW Sentipede feet 180°DIP H=4.30

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E−mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E−mail: salesks@wcon.com