HSF

NOTES:
Rated Current:3.0AMP.
Rating Voltage:250V AC/DC
Contact Resistance:20mΩ Max.
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-25℃ to +85℃

Insulator Material:PA66 UL94V-0
Use with:WF2541-T
Mated with:WF2541-Wafer

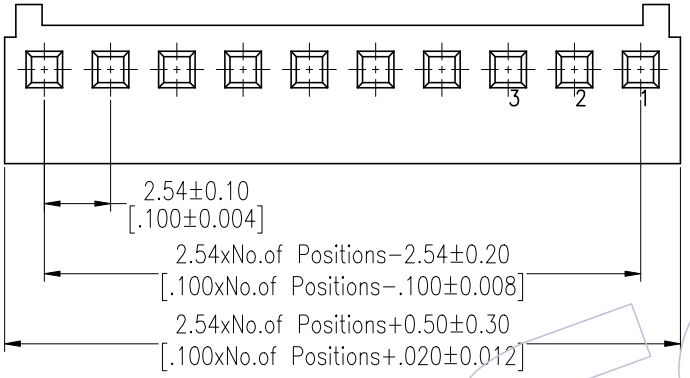

Ordering Information

WF2541 - H XX X 0 1

- XX: No.of Pins 02~16P
- X: Colour E= Beige
- 0: Packing 0= PE Bag

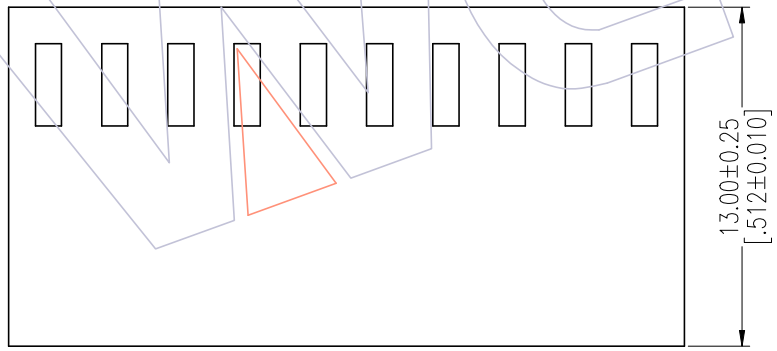

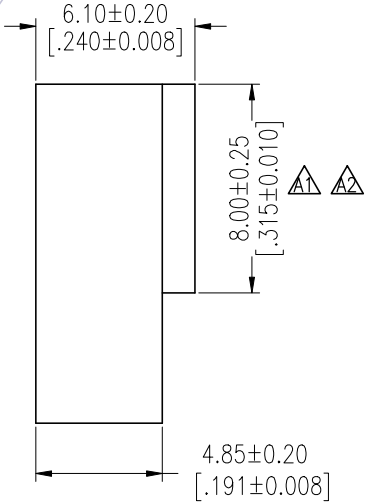

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2020/08/11	MODIFY THE DIM A2	——
A1	2013/09/02	MODIFY THE DIM A1	JYHuang
A0	2012/09/07	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW DUAN	DATE 2020/08/11	SCALE	FIT
CHECK	DATE	UNIT	mm inch
APPROVE	DATE	SIZE	A4
		SHEET	1/1
		PROJ.	

PART NO. WF2541-HXXX01

TITLE: "M" TYPE 2.54mm Housing

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com