


HSF

NOTES:
 Current Rating:1A AMP
 Contact Resistance:20milliohm Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000Megohm Min
 Operation Temperature:-40°C to +105°C






Housing Material:PA9T+33%GF(UL94V-0)
 Below Cover Material:PA9T+33%GF(UL94V-0)
 Contact Material:Brass
 Contact plating:Au or Sn over Ni Plating

Ordering Information

3242-XX R XX B S T 1

No. of Pins	Contact Plating	Color Insulator	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
14 40	G3=10u"Gold		
16 44	G4=15u"Gold		
20 50	G5=30u"Gold		
24 60	S0=Gold Flash/Tin		
26 64	S3=10u"Gold/Tin		
30 80	S4=15u"Gold/Tin		
32 100	S5=30u"Gold/Tin		
	SN=Tin		

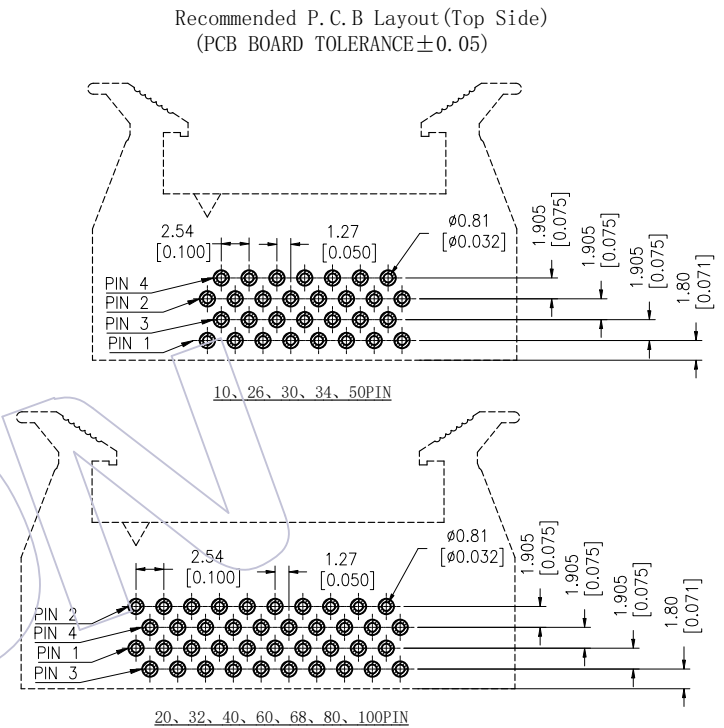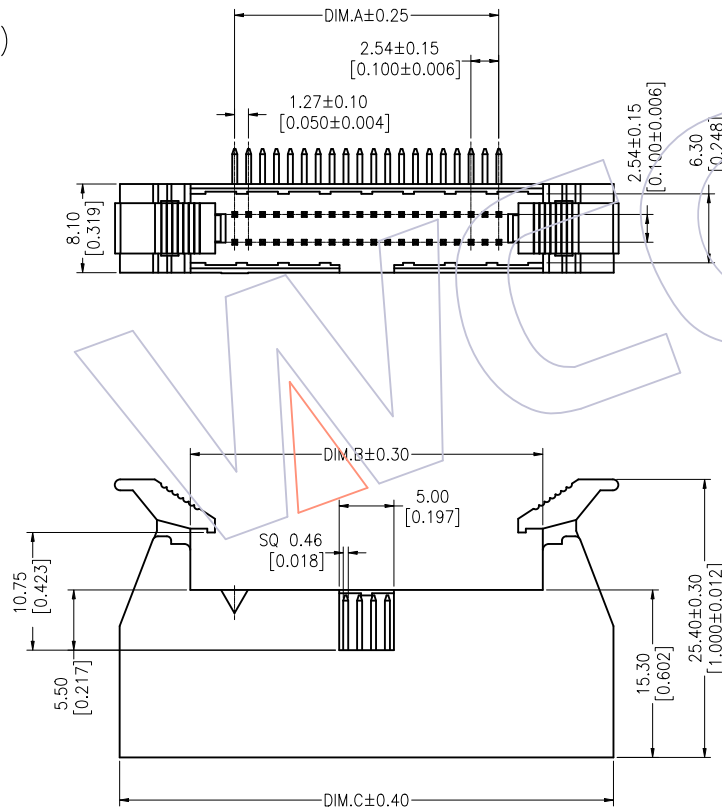

No. Of POSITION	DIM.A	DIM.B	DIM.C
10	5.08	13.15	26.06
20	11.43	19.50	32.41
26	15.24	23.31	36.22
30	17.78	25.85	38.76
32	19.05	27.12	40.03
34	20.32	28.39	41.30
40	24.13	32.20	45.11
50	30.48	38.55	51.46
60	36.83	44.90	57.81
68	41.91	49.98	62.89
80	49.53	57.60	70.51
100	62.23	70.30	83.21

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2013/11/21	NEW		X.X ±0.40	Tsingnsn	2013/11/21	UNIT mm		3242-XXRXXBST1
				X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE:
				X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		1.27*2.54 EJECTOR HEADER SHORT LATCH 90° DIP
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com