






# HSF

Current Rating: 3.0A  
 Voltage Rating: 32V  
 Insulation Resistance: 1000MΩ min 500V DC  
 Withstanding Voltage: 1000V  
 Operation Temperature: -20°C to +85°C  
 Insulation  
 Material: LCP  
 Flammability: UL94V-0  
 Color: Black  
 Contact:  
 Material: Copper Alloy  
 Plating:  
 Underplating: 100u" Nickel  
 Wiping Area: Gold with Lubricant  
 Solder Tails: Gold Flash  
 Solder Tabs: 120u" Matte Sn  
 over 40-120u" Nickel

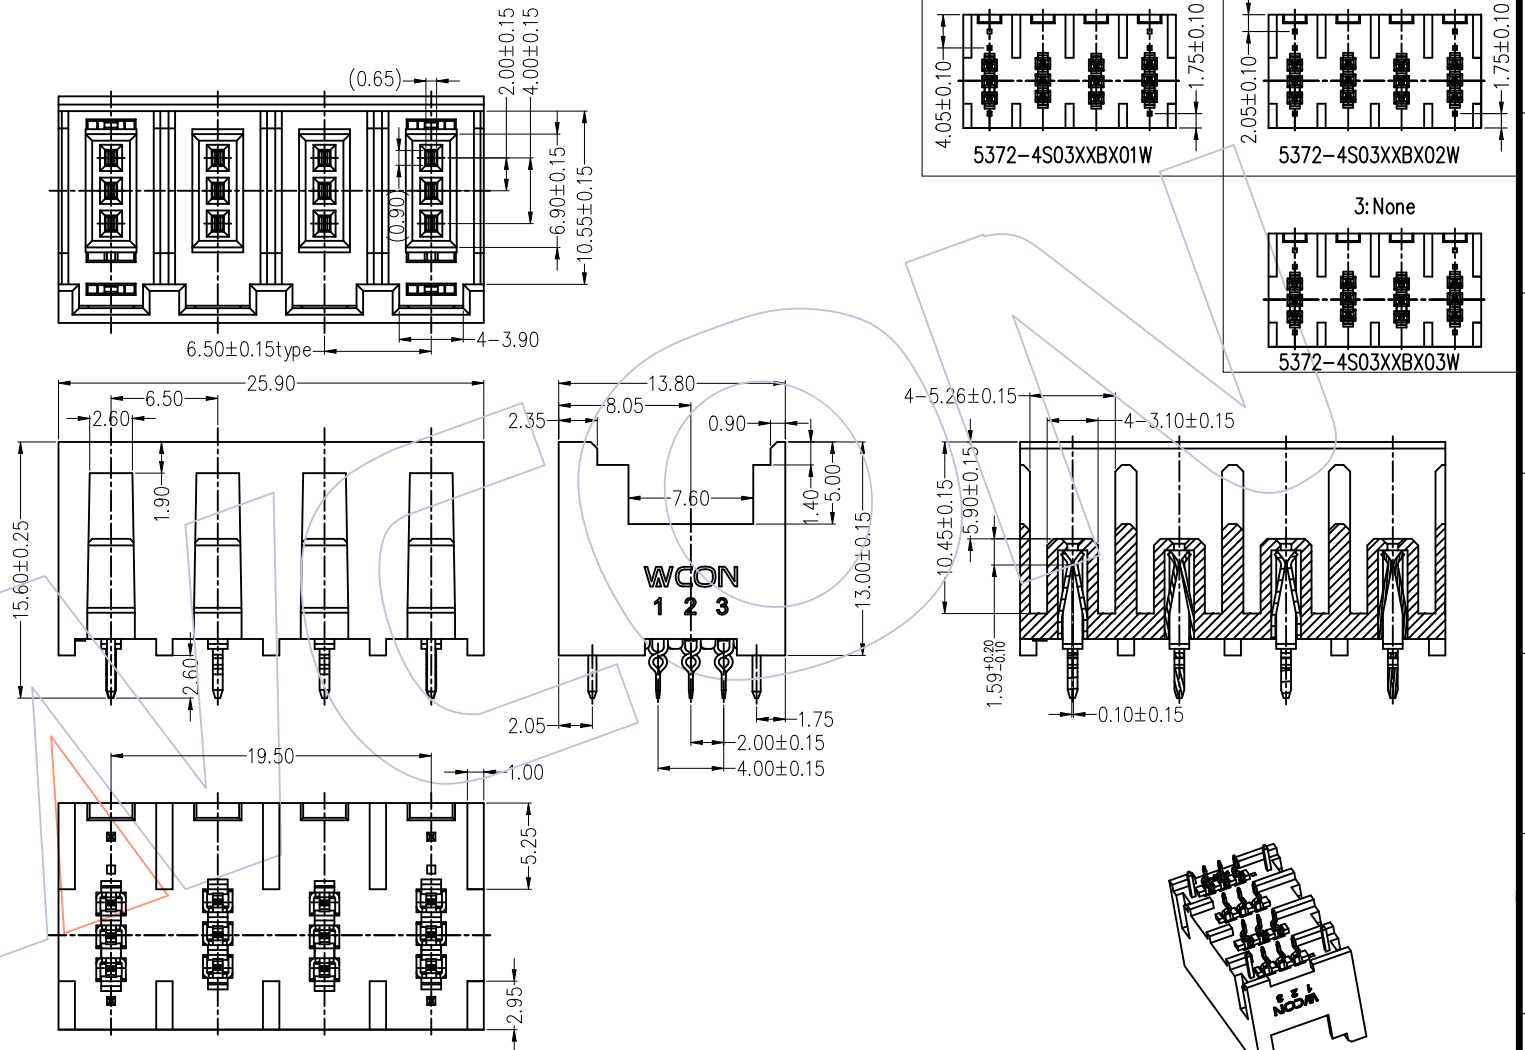

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	<b>WCON</b> Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X ±0.40	Kair	2020/12/01	UNIT	mm	<b>5372-4S03XXBX0XW</b> TITLE: <b>2.0mm Mini Clamp Socket 12p</b> <b>Four Rows Through Hole Type</b>	
				X.XX ±0.25	CHECK	DATE	inch	A4		
A0	2020/12/01	NEW	Kair	X.XXX ±0.15	APPROVE	DATE	SHEET	1/2	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle ± 3°			PROJ.			
				DIM	TOL					

# HSF

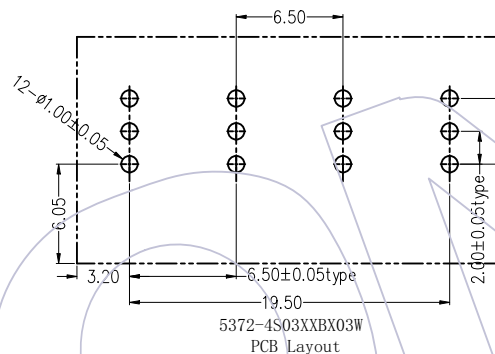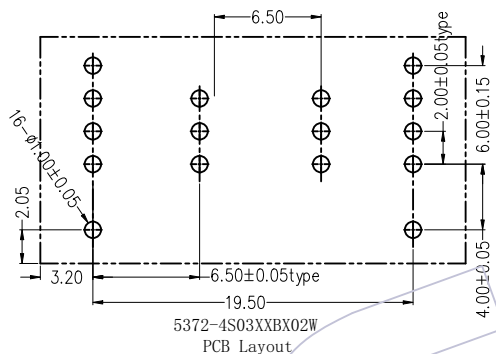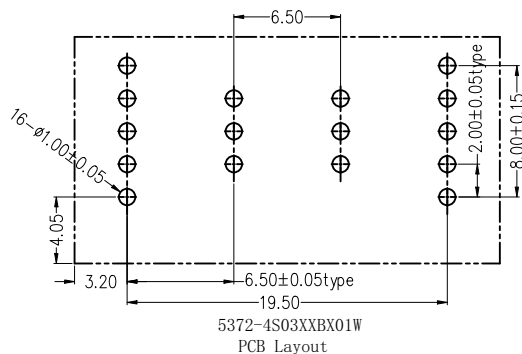

Recommended Hole Pattern

## Ordering Information

5372 - 4 X 03 XX X X XX X

FOUR ROW

Type

M=180° SMT  
R=90° Dip  
S=180° Dip  
Z=90° SMT

Pin

03=3P

Terminal Plating

S0=Gold Flash/Tin  
S1=3u"Gold/Tin  
S2=5u"Gold/Tin  
S3=10u"Gold/Tin  
S4=15u"Gold/Tin

Color  
B=BLACK  
N=NATURAL

Packing  
T=Tube  
R=Tape&Reel  
A=Tray  
O=PE Bag

LOGO

NA

W=With WCON LOGO

M=Customer'S LOGO

Series No. SPC.



(01-99)

Locating Posts

1=Symmetrical

2=Asymmetrical

3=None

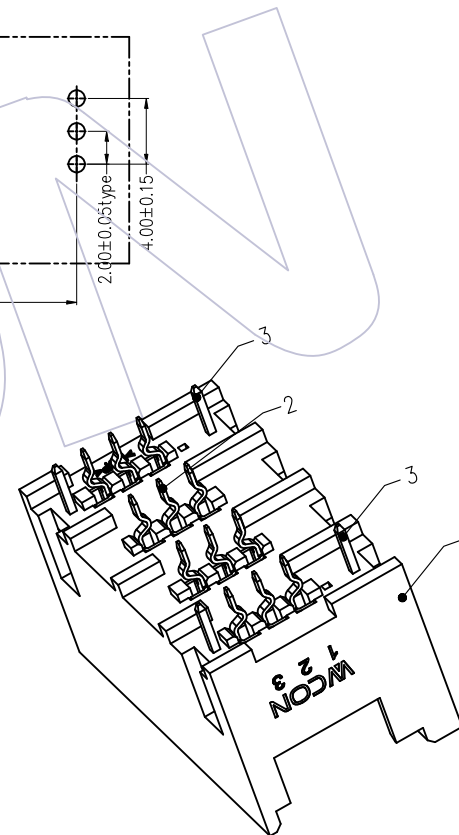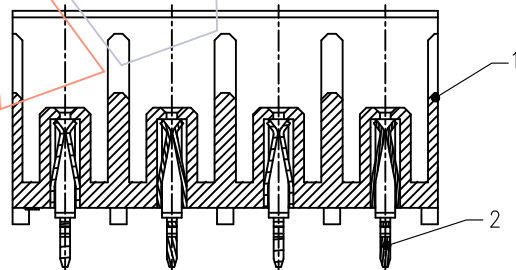

3	Dip-Tab	M5372-BXXS05	C2680	4
2	Contact	T5372-PXXS04	C5191R-H	12
1	Housing	G5372-4S03B01W	LCP	1
No.	Part Name	Part No.	Material	Q'TY

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2020/12/01	NEW	Kair	X.X ±0.40	Kair	2020/12/01	UNIT	mm	5372-4S03XXBX0XW
				X.XX ±0.25	CHECK	DATE	inch	SIZE	
				X.XXX ±0.15			SHEET	2/2	TITLE:
				Angle ± 3°	APPROVE	DATE	PROJ.	Customer NO.	2.0mm Mini Clamp Socket 12p Four Rows Through Hole Type
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan  
Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: sales@wcon.com

WCON-Kunshan  
Tel: +86 512 57468408  
Fax: +86 512 57468468  
E-mail: salesks@wcon.com