



HSF

TECHNICAL SPECS:

Current Rating:1.0AMP
 Contact Resistance:10mΩ Max
 Dielectric Strength: Min 1000VRMS
 Mechanical Life: Min 100 cycles
 Connecting Pin:∅0.64mm
 Operation Temperature:-40°C to+105°C

Contact:Brass CuZn36Pb3(C36000)
 Contact plating:Au over Ni
 Insulator Material:PPS+30%G.F(UL94V-0)
 06P~18P Insulators without center bar
 20P~28P Insulators with center one bar


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

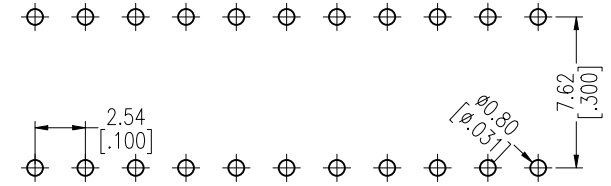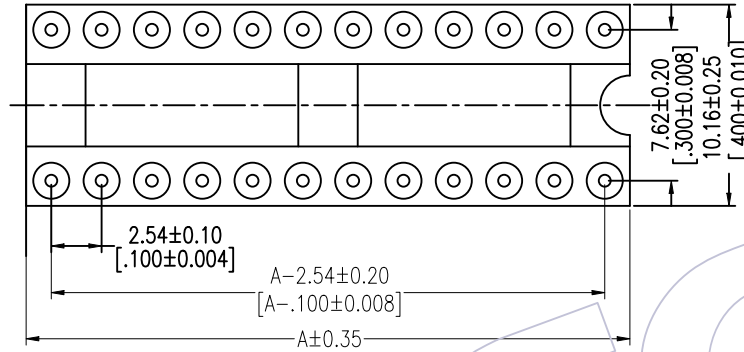

Ordering Information

3560-301 XX S XX 122 X 1

Row of Pitch 1=7.62mm
 No. of Pin See tab
 Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold
 Packing T=Tube A=Tray

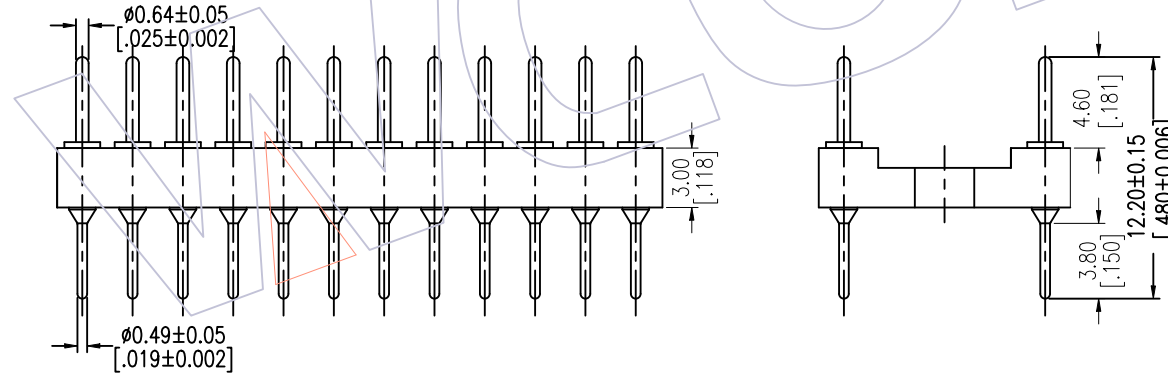

Dimensional & Ordering Information

NO.of Poles	Part No.	Dim
		A
06	3560-30106SXX122X1	7.62
08	3560-30108SXX122X1	10.16
10	3560-30110SXX122X1	12.70
12	3560-30112SXX122X1	15.24
14	3560-30114SXX122X1	17.78
16	3560-30116SXX122X1	20.32
18	3560-30118SXX122X1	22.86
20	3560-30120SXX122X1	25.40
22	3560-30122SXX122X1	27.94
24	3560-30124SXX122X1	30.48
28	3560-30128SXX122X1	35.56

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/11/05	NEW	-----	X.X ±0.40	JYHuang	2012/11/05	UNIT mm		SEE TAB
				X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 2.54mm MACHINED ADAPTER CONNECTOR 180° H=3.0 L=12.2 Row of Pitch 7.62
				X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com