




NOTES:  
 Rated Current: 3.0A  
 Contact Resistance: 20mΩ Max.  
 Applicable Wire: 0.3sq., AWG#22, #24  
 Operation Temperature: -40°C to +105°C

Contact Material: Copper alloy  
 Contact Plating: 100u" Bright Tin over 50u" nickel

### Ordering Information

WF2012-T P SN 01

Type  
 T=Contact  
 Contact Material  
 P=Copper alloy  
 Contact Plating  
 SN=Bright Tin  
 Internal code

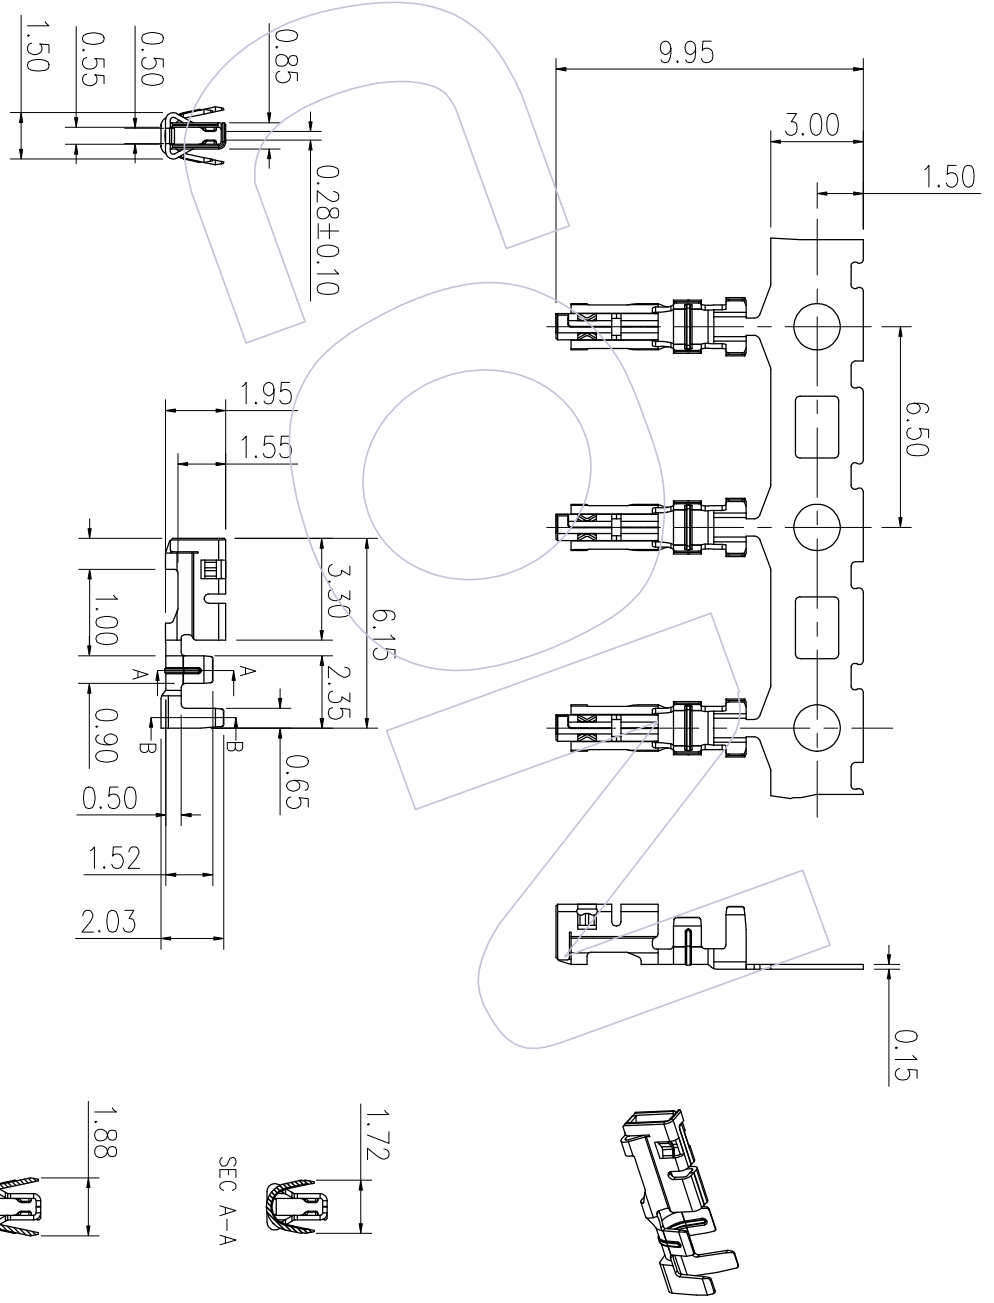

OPERATION	±0.40	DRAW	Bruce	DATE	2019/02/20	SCALE	1:1	PART NO.	WF2012-TP XX 01
X.XX	±0.25	CHECK		DATE		UNIT	mm	TITLE:	2.0mm HOUSING DISTRIBUTING TERMINAL
X.XXX	±0.15	APPROVE		DATE		SIZE	A4		
Angle	± 3'					SHEET	1/1	Customer NO.	
DIM	TOL					PROJ.			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE						
A0	2019/02/20	NEW							
1									



Http: www.wcon.com  
 WCON-Dornguon  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com

SEC B-B

SEC A-A