

HSF

IDC HOUSING MATERIAL

Insulation Material:PBT+30%GF(UL94V-0)

Contact Material:Phosphor Bronze/BRASS

Contact plating:Au or Sn Over Ni

Micro Match HOUSING MATERIAL

Insulation Material:PBT+30%GF(UL94V-0)

Contact Material:Phosphor Bronze

Contact plating:Au or Sn Over Ni

Insulation Resistance:5MΩ Min


Contact Resistance:1.0Ω Max

DC 300V, 10S

The Cable Assembly Must 100% Test

Insulation:UL 2651,Grey Red Side

Conductor:28AWG(7/0.12mm)

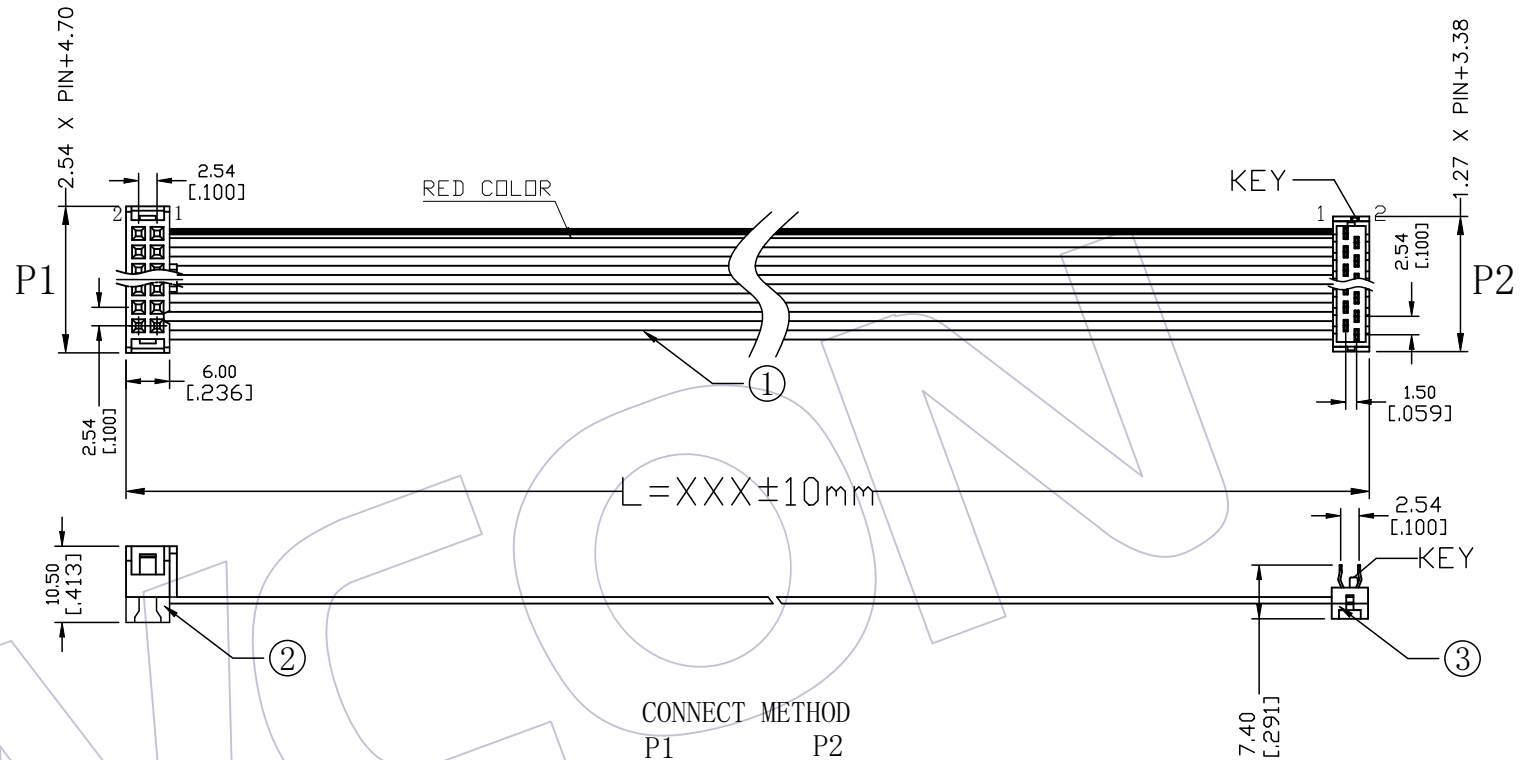

Ordering Information

F3900E - XX XX A X XXX 001

No.OF Pins
04-20p

Contact Plating:

G0=Gold Flash
G3=10u"Gold
G4=15u"Gold
G5=30u"Gold
S0=Gold Flash/Ni
S3=10u"Gold/Ni
S4=15u"Gold/Ni
S5=30u"Gold/Ni
SN=Tin

Conn.Color:

B=Black
G=Grey(427C)
R=RED


Length of Line

CONNECT METHOD

P1	P2
1	1
2	2
3	3

XX ——— XX
XX ——— XX

NO.	PART NO.	NAME	TITLE	QTY	UNIT
③	3900-XXMIXXAWX	CONN.	1.27 Micro DIP PLUG IDC PBT RED Plating:SN	1	SET
②	5212-XXXXXXXXX0	CONN.	2.54 IDC **P PBT Color:XXX material:XX, Plating Xu" gold	1	SET
①	F1U-C28GXXD0-XXXX-1	WIRE	UL2651 PH1.27mm XXP 28AWG(7/0.12TC) PVC Grey Marking Red Side	XXXX	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
				X.X ±0.40	BEN	09/09/02	UNIT mm/inch		F3900E-XXXXXXXXX001	
				X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 1.27 MRC Drawing	
				X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.	
				Angle ± 3° DIM TOL			PROJ.			