

HSF

NOTES:

Current Rating:1AMP
 Contact Resistance:30mΩ max
 Withstand Voltage:250V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze(C5191-H)
 Contact plating:Au Or Sn Over Ni
 Insulator Material:PA9T+30%GF(UL94V-0)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)


Ordering Information

WF1271- 1 WS H XX S0 B T 1

No.of Pins
4-50 PIN

Contact Plating
S0=Gold Flash/Tin

Packing:
T=Tube

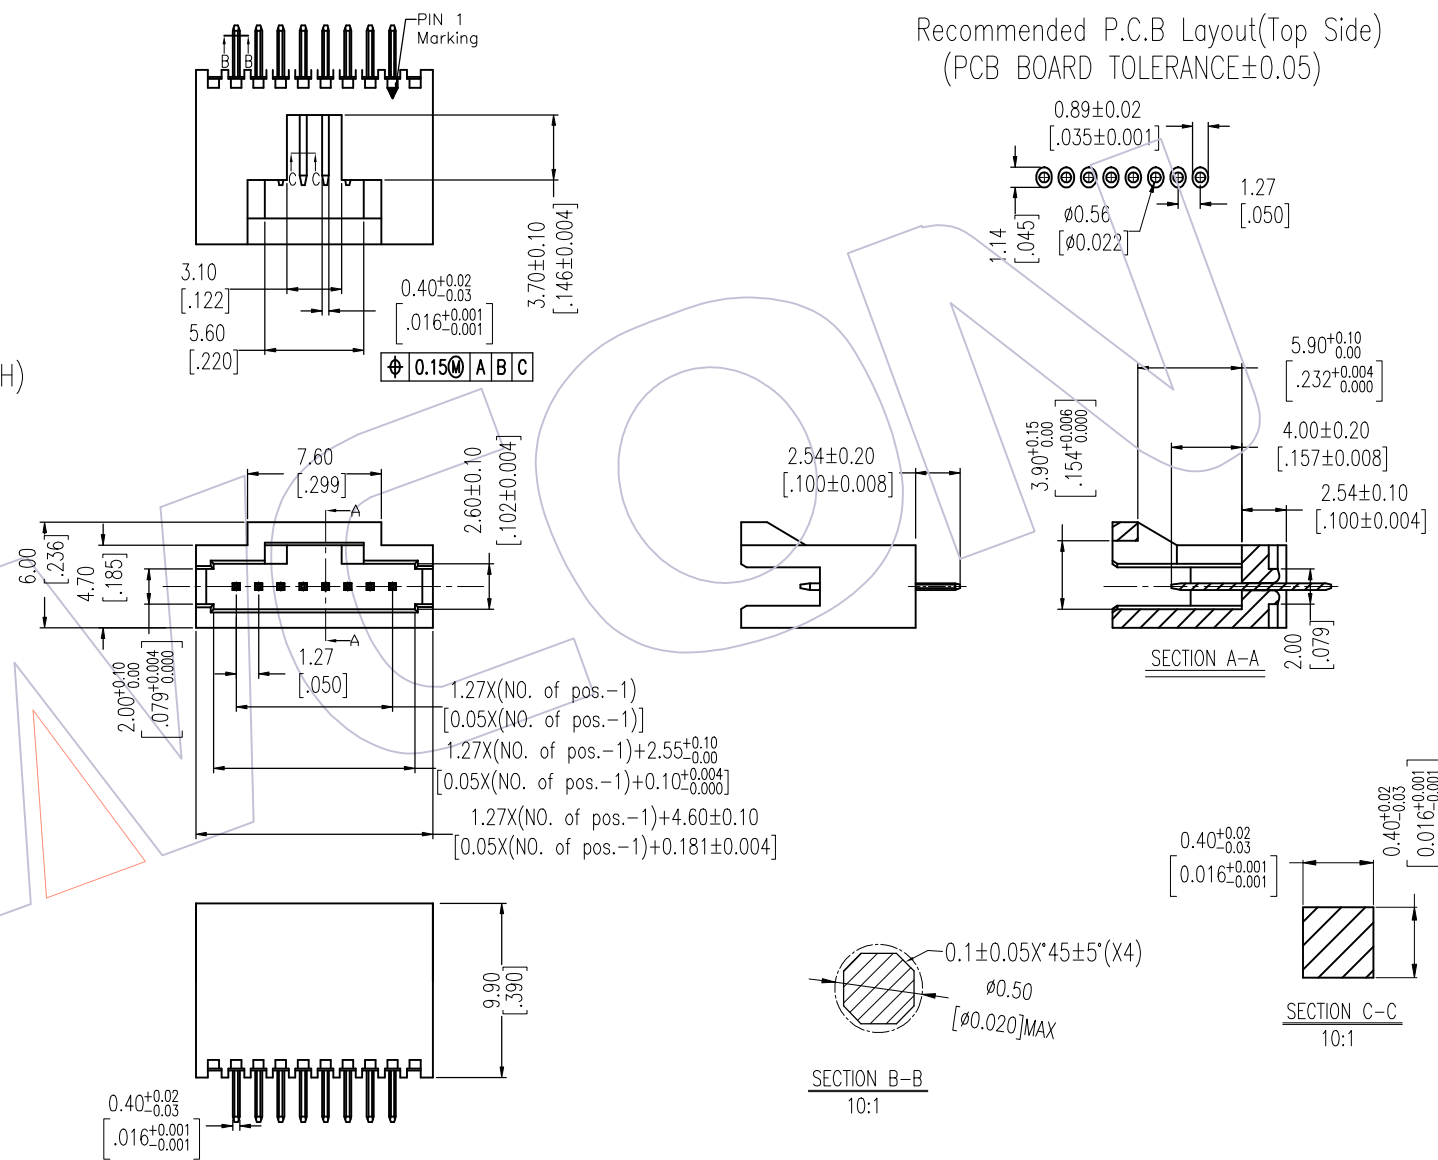

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				X.X	±0.40					
				X.XX	±0.25	JYHuang	2016/07/14	UNIT	mm	WF1271-1WSHXXS0BT1
				X.XXX	±0.15	CHECK	DATE	SIZE	A4	
AO	2016/07/14	NEW		Angle	± 3'	APPROVE	DATE	SHEET	1/1	TITLE: 1.27 Wafer Conn 180° DIP Without Ear
				DIM	TOL			PROJ.	◆	Customer NO.

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com