


HSF

IDC HOUSING MATERIAL
 Insulation Material: PBT+30%GF(UL94V-0)
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni

SPECIFICATIONS
 Insulation Resistance: 5MΩ Min
 Contact Resistance: 1.0Ω Max
 Withstand Voltage: DC 300V, 10S
 The Cable Assembly Must 100% Test

CABLE MATERIAL
 Insulation: UL 2651, Grey Red Side
 Conductor: 28AWG(7/0.12mm)
 Electrical: 300V

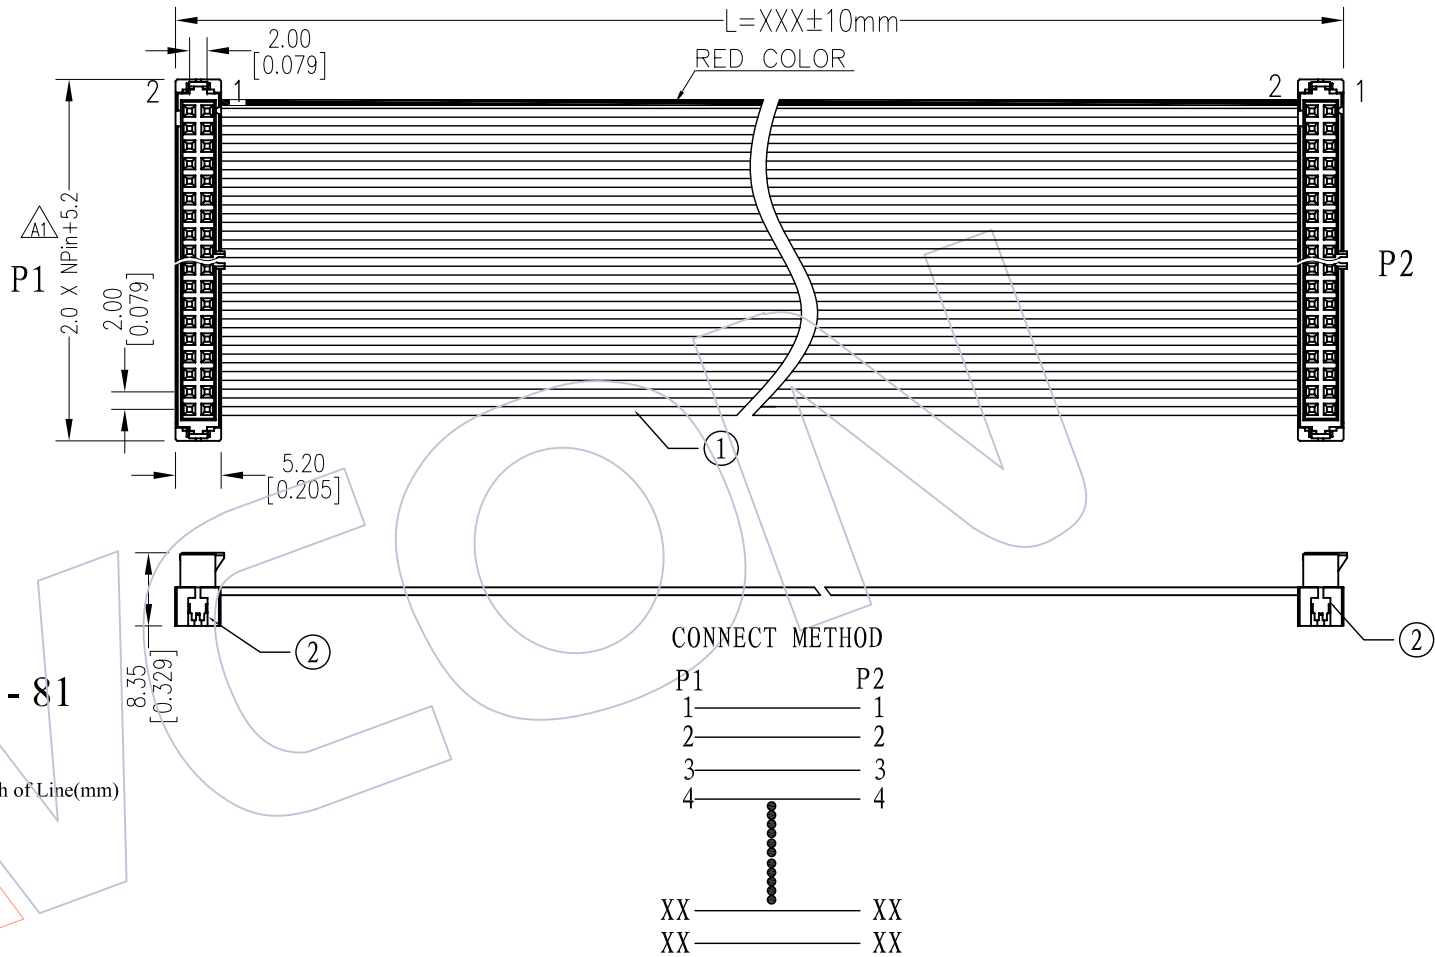

Ordering Information

FA22 - xx xx A A B xxx - 81
 No. OF Pins: 04~64p
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold
 Connector Color: B=Black
 Connector Direction: A=same Direction
 Length of Line(mm)

②	5223-XXYPXXBW01	2.00 IDC **P T TYPE PBT Black Phosphor Bronze Plating Xu"	2	SET
①	F1U-B28GXXD0-XXXX-1	UL2651 PH1.0mm XXP 28AWG (7/0.12TC) PVC Grey Marking Red Side	XXXX	MM
NO.	TITLE		QT'Y	UNIT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2012/06/08	Change the Dimension		X.X ±0.40	JYHuang	2012/06/08	UNIT mm		FA22 - xxxxAABxxx- 81
AO	2009/08/27	NEW		X.XX ±0.25	CHECK	DATE	SIZE A4		TITLE: 2.00 T TYPE IDC Drawing
				X.XXX ±0.15	APPROVE	DATE	SHEET 1/1		Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com