



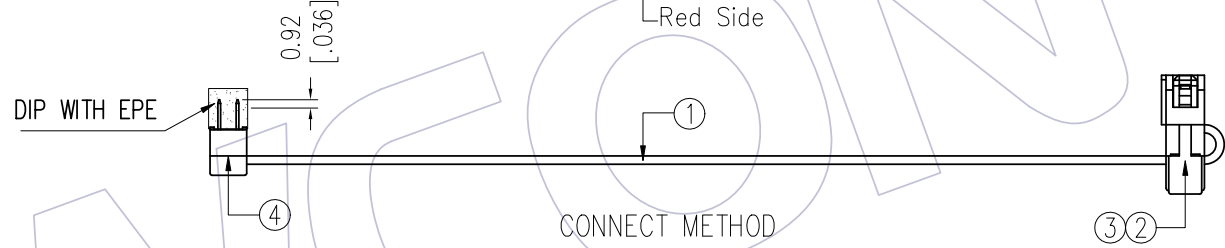

SPECIFICATIONS:
 Contact Resistance: 1Ω Max.
 Insulation Resistance: 5MΩ Min.
 Withstand Voltage: 300V AC
 The Cable Assembly Must 100% Test

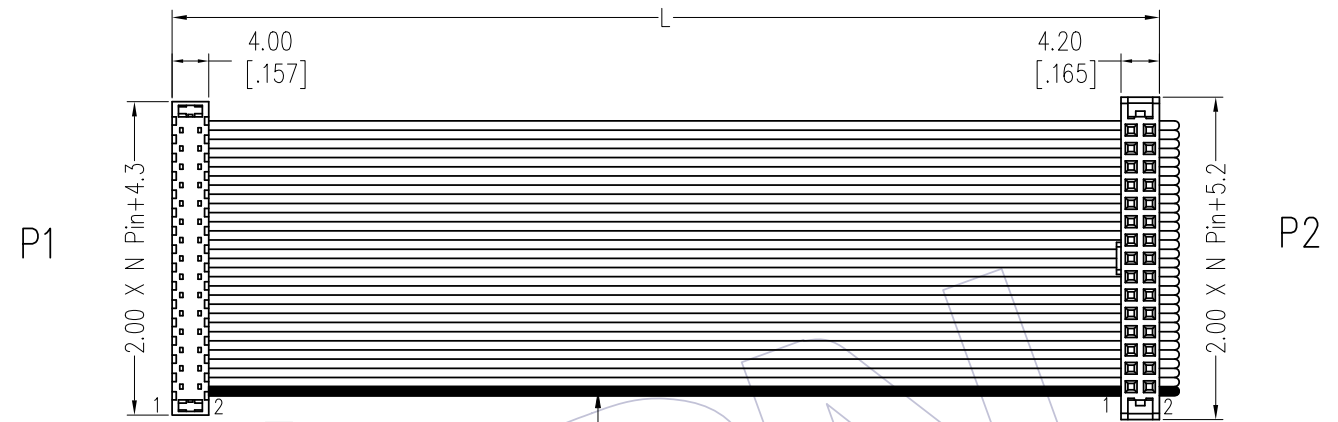

Ordering Information

FB22 - XX XX F A B XXX - 03
 No.OF Pins: 06~64p
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Ni, S3=10u"Gold/Ni, S4=15u"Gold/Ni, S5=30u"Gold/Ni, SN=Tin
 Connector Color: B=Black
 Connector Direction: F=same Direction
 Length of Line(mm): Wcon Code 01~99

CONNECT METHOD

P1	1	Red	P2	1
	2	Grey		2
		●		
		●		
		●		
XX		Grey	XX	
XX		Grey	XX	

LENGTH	TOLERANCE
≤100	±5
101~1000	±10
1001~3000	±20
3001~	± Lx1%

NO.	PART NO.	NAME	TITLE	QT'Y	UNIT
④	5320-XXPS0B01	CONN.	2.00 DIP Plug,XP,PBT BK,P/Bronze,Sel.G'F/Ni	1	PCS
③	G5220-XXDB01	SR	2.00 IDC Socket SR,XP,PBT BK	1	PCS
②	5222-XXYPS0BW01	CONN.	2.00 IDC Socket,XP, Spring Type,W/T Bump,PBT BK,P/Bronze,XuAU/Ni	1	PCS
①	F1U-B28GXXD0-XXXX-X	WIRE	1.00 Flat Cable,XP,PVC Grey,Red Side,UL2651,28AWG(7/0.12)	-	MM

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020/11/09	NEW	-

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
X.X ±0.40	XSR	2020/11/09	UNIT	mm [inch]	FB22-XXXXFABXXX-03
X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	2.0 DIP+2.0 IDC+SR
Angle ± 3'			PROJ.		CUSTOMER NO.
DIM TOL					

UNIT	SIZE	SHEET	PROJ.
mm [inch]	A4	1/1	

WCON
 Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com