

HSF

NOTES:


Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%G.F UL94V-0



Ordering Information

3121-XX R XX B K00 X 1

△ No. of Pins	Contact Plating	Color Insulator	Packing
14 30	G0=Gold Flash	B=Black	T=Tube
16 34	G3=10u"Gold		
20 40	G4=15u"Gold		
24 44	G5=30u"Gold		
26 50	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		
	SN=Tin		

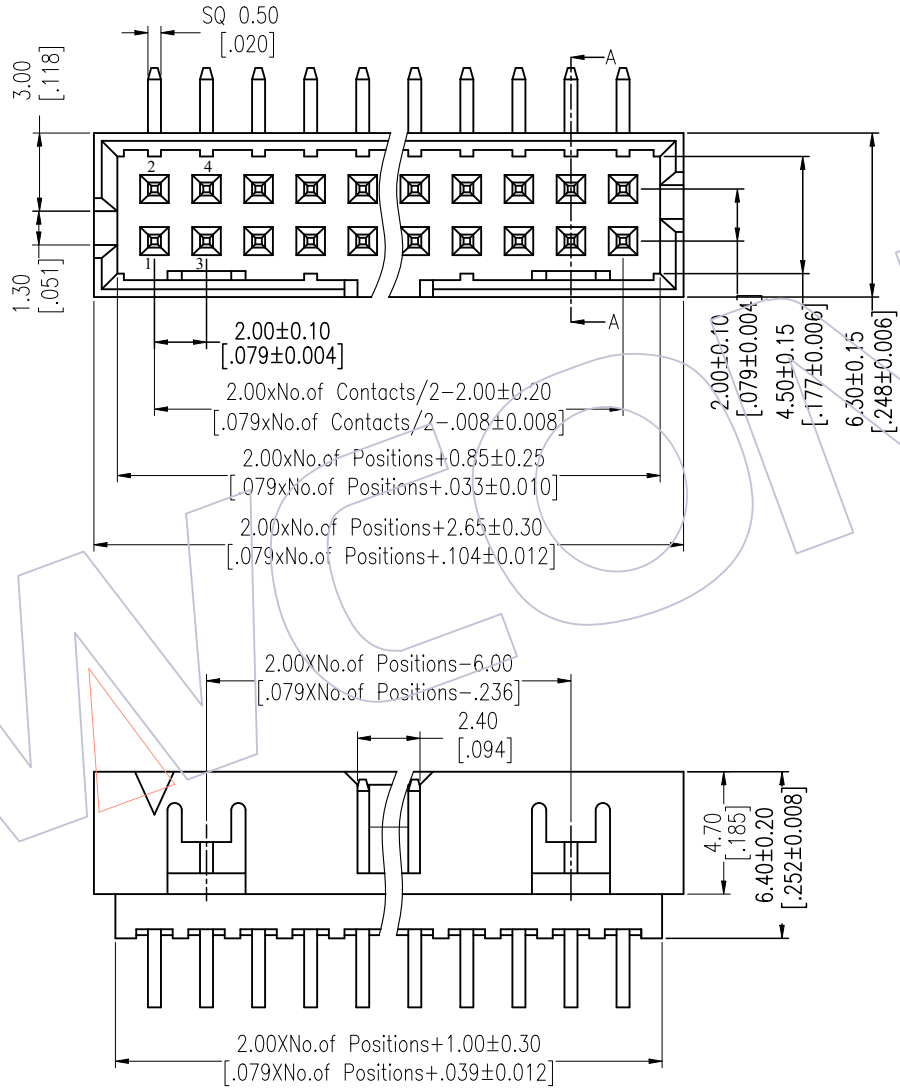

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

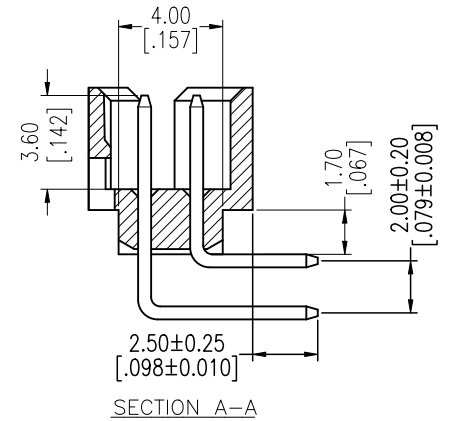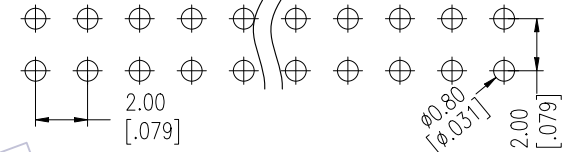

Item	Pitch	Mating
Standard	2.00	5223/5226
Alternate		

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
x.x ± 0.40	Allen	2015/08/27	UNIT	mm	3121-XXRXXBK00X1
x.xx ± 0.25	CHECK	DATE	SIZE	A4	TITLE:
x.xxx ± 0.15	APPROVE	DATE	SHEET	1/1	2.00 BOX HEADER 90° H=6.4
Angle ± 3°			PROJ.		Customer NO.
DIM TOL					

WCON
 Http: www.wcon.com
 WCON-Dongguan
 WCON-Kunshan
 Tel: +86 769 85358920
 Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: salesks@wcon.com