
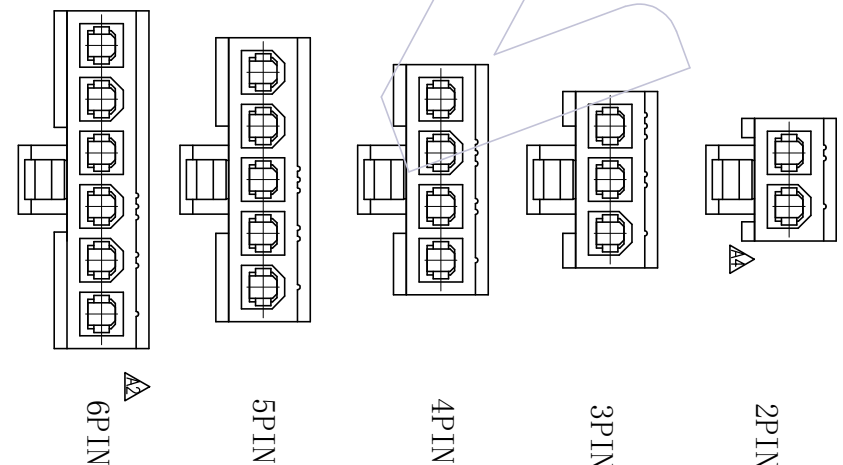


NOTES:
Rated Current:9.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃
Insulator Material:PA66 UL94V-2/V-0
Use with: WF4202-T (Female Contact)

Size Wire	Ckt	2&3	4-6
AWG#18	9A	8A	
AWG#20	7A	6A	
AWG#22	5A	4A	
AWG#24	4A	3A	

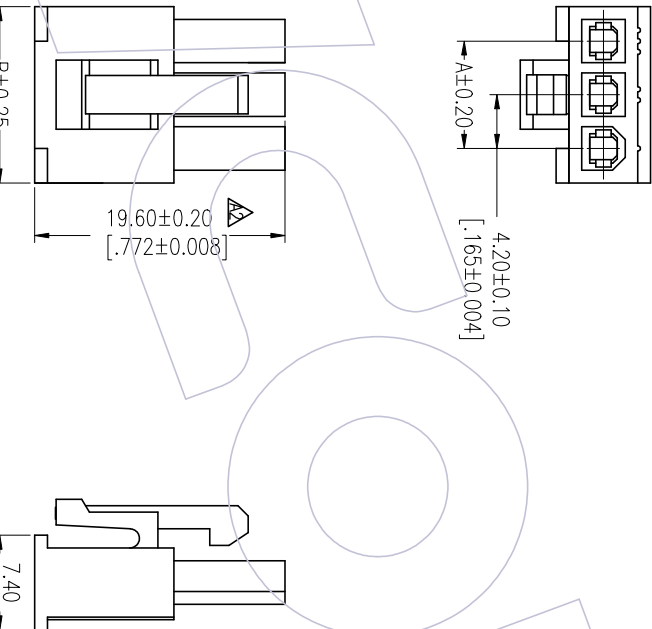

Ordering Information

WF4202-1HXX X 0 1

No of pins
02P-06P
Color
W=White(透明,V2) 0=PE Bag
T=White(V0)
B=Black(V0)

Circuit	Part No.	Dimension	
		A	B
02	WF4202-1H02X01	4.20	9.60
03	WF4202-1H03X01	8.40	13.80
04	WF4202-1H04X01	12.60	18.00
05	WF4202-1H05X01	16.80	22.20
06	WF4202-1H06X01	21.00	26.40

Specification & Ordering Information:

A4	2025/01/06	Add 2PIN Bump	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	
A3	2024/07/01	Add Color,Modify Rated Current:See Table	X.X	BA0	2025/01/06	UNIT	mm	SEE TAB	
A2	2021/12/24	Update Drawing	X.XX	CHECK	DATE	SIZE	A4	TITLE:	
AO	2012/09/17	NEW	X.XXX			SHEET	1/1	4.20mm Mini Fit Housing	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DATE	PROJ.		Customer NO.	



Http: www.wcon.com
WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com