

HSF

NOTES:

Current Rating: 1.0A AC/DC
Voltage Rating: 50V AC/DC
Temperature Range: -40℃ to +105℃
Contact Resistance: 30mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/Minute





Material: Phosphor Bronze
Contact plating: Sn over Ni or Au over Ni
Insulation O.D.: $\phi 0.80$ to 1.0mm (Max)
Fit wire Range: 28#~32#AWG(WF1256-TPXX01)
26#AWG(WF1256-TPXX02)

Ordering Information

WF1256-T P XX 0X

Terminal Material
P: Phosphor Bronze

Contact Plating:
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
SN=Tin

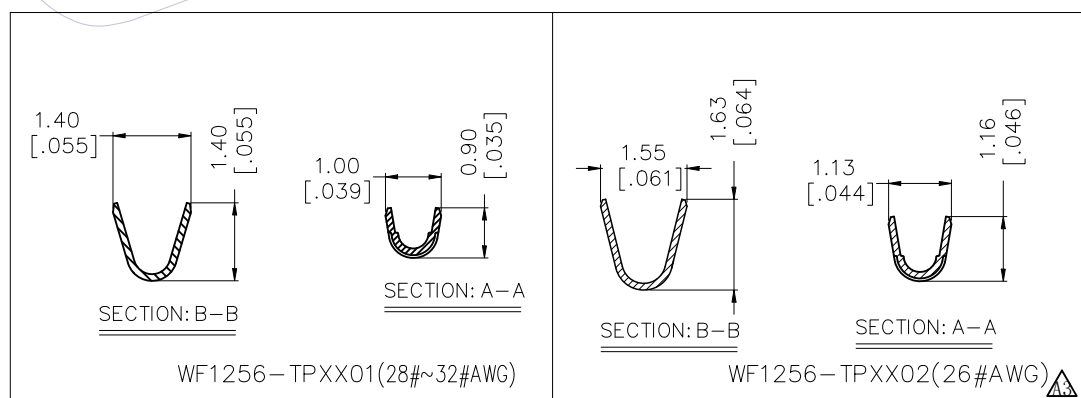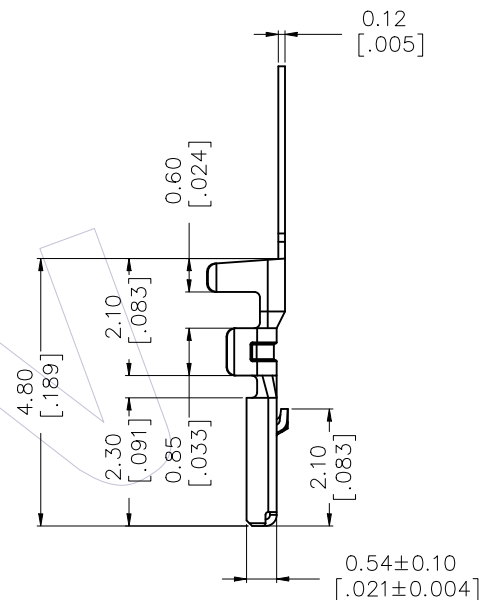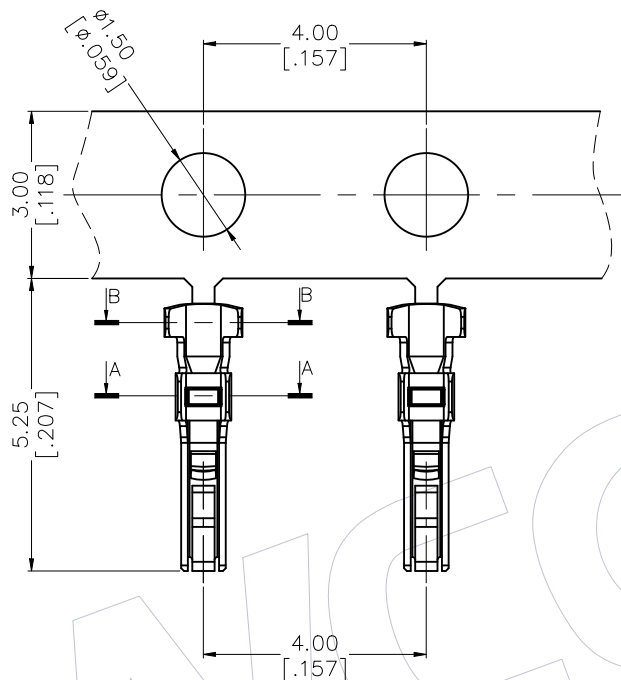

A3	2024.04.11	Add 26#AWG	△	DuYing	OPERATION	DRAW	DATE	SCALE	1:1	PART NO.	WCON Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A2	2021.08.11	Modify Operation Temperature	△	DuYing	X.X ±0.40	DuYing	2024.04.01	UNIT	mm inch	WF1256-TPXX0X	
A1	2019.10.26	Add wire Range	△	SU	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:	
A0	2012.11.05	NEW		LKP	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	1.25mm Crimp Terminal	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle ± 3° DIM TOL			PROJ.		Customer NO.	