

HSF

NOTES:

Current Rating: 7.0AMP

Contact Resistance: 30mΩ Max

Withstand Voltage: 1000V AC/DC

Insulation Resistance: 1000MΩ Min

Operation Temperature: -40℃ to +105℃


Contact Material: Phosphor Bronze

Contact plating: Sn over Ni

Insulator Material: LCP+30%G.F UL94V-0

Recommended P.C.B Layout(Top Side)

(PCB BOARD TOLERANCE±0.05)

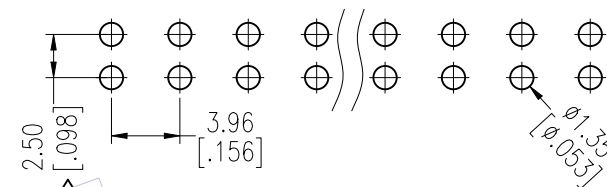


Ordering Information

2889 - 1 XX S XX DUNT 1



No. of Pins per
ROW: 02-20PIN

SN=Tin
SM=Matte Tin

Packing:
T=Tube

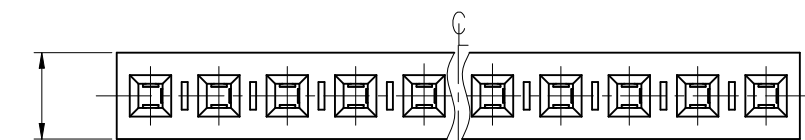

5.00±0.15
[.197±0.006]

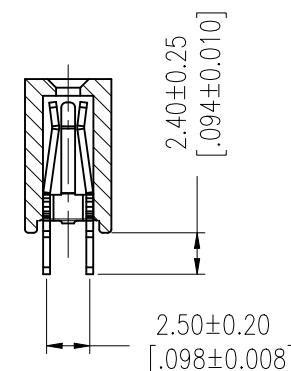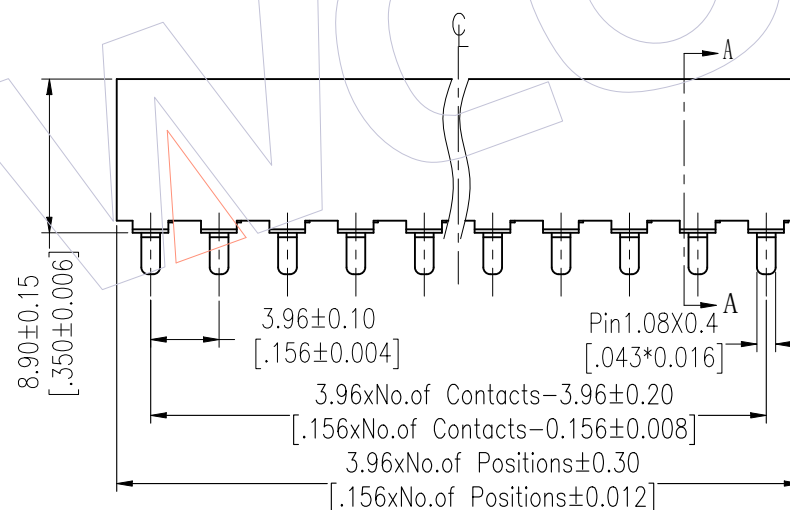

SECTION "A-A"

Item	Pitch	Mating
Standard	3.96	1832
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A2	2017/11/21	Correct 2.25 to 2.50	-----	X.X ±0.40	Surong Xu	2017/11/21	UNIT	mm	2889-1XXSXXDUNT1
A1	2017/06/08	MODIFY	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
A0	2012/08/18	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	FH3.96 SINGLE ROW 180°DIP H=8.9
				Angle ± 3°			PROJ.		Customer NO.
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com