

HSF

NOTES:

Rated Current:3.0A

Contact Resistance:20mΩ max

Withstand Voltage:1000V AC/Minute



Insulation Resistance:1000MΩ min

Operation Temperature:−40℃ to +105℃

Contact Material:Brass

Contact Plating:Au Or Sn over Ni

Insulator Material:PA9T+33%G.F (UL94V-0)

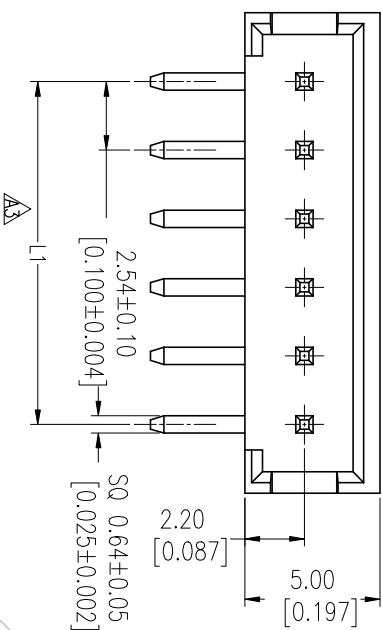


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


Ordering Information

WF2548 -1 WR XX X 0 I

No. of Row
Single Row
No. of pins
2P-22P
Contact Plating
Sf=Gold Flash/Tin
S3=10u/Gold/Tin
S4=15u/Gold/Tin
S5=30u/Gold/Tin
G0=Gold
G3=10u/Gold
G4=15u/Gold
G5=30u/Gold
Blank=Tin
Color
B=Black
W=White
Packing
0=PE Bag
T=Tube

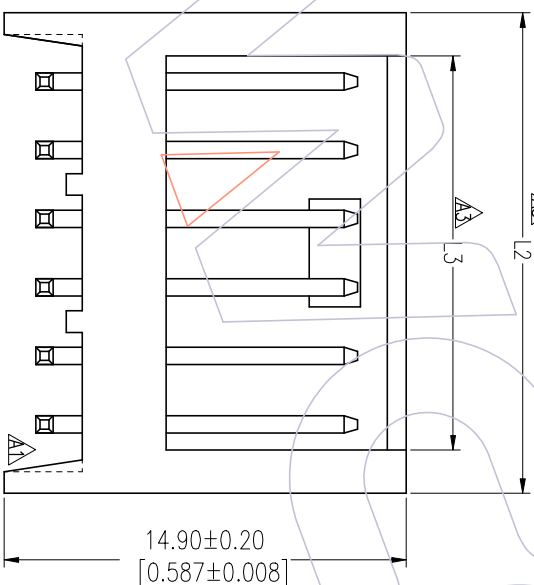

5P及以上

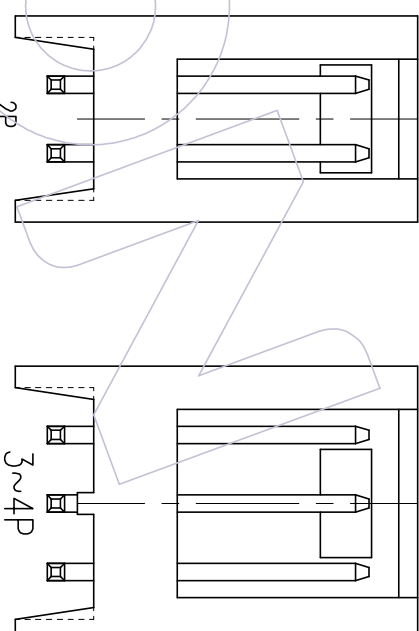

2-12P	L1	2.54XNo. of Positions-2.54±0.20 [0.100XNo. of Positions-0.100±0.008]
	L2	2.54XNo. of Positions+2.54±0.25 [0.100XNo. of Positions+0.100±0.010]
	L3	2.54XNo. of Positions-0.64±0.25 [0.100XNo. of Positions-0.025±0.010]
13-22P	L1	2.54XNo. of Positions-2.54±0.25 [0.100XNo. of Positions-0.100±0.010]
	L2	2.54XNo. of Positions+2.54±0.30 [0.100XNo. of Positions+0.100±0.012]
	L3	2.54XNo. of Positions-0.64±0.30 [0.100XNo. of Positions-0.025±0.012]

A3	2018/02/05	Modify	△3	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	 Http: www.wcon.com WCON-Kunshan Tel: +86 769 85358920 Fax: +86 512 57468408 E-mail: sdcses@wcon.com
A2	2017/02/28	Modify	△2	X.X	Rupeng	2018/02/05	UNIT	mm	WF2548-1WRXXX01	
A1	2015/07/27	Modify	△1	X.XX	CHECK	DATE	SIZE	A4	TITLE: 2.54 SINGLE ROW 90° DIP WAFER	
A0	2012/09/08	NEW	—	X.XXX	±0.15	DATE	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	PROJ.	Customer NO.		
				± 3'	TOL					

WCON

Http: www.wcon.com

WCON-Dongguan

WCON-Kunshan

Tel: +86 769 85358920 Tel: +86 512 57468408

Fax: +86 769 85358915 Fax: +86 512 57468468

E-mail: sales@wcon.com E-mail: sales@wcon.com