
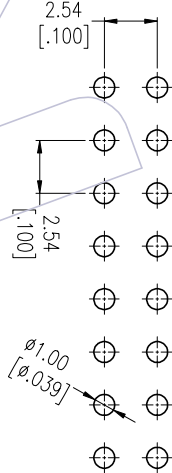


HSF

NOTES:
Current Rating:3.0A AMP
Contact Resistance:20millionhm Max
Withstand Voltage:1000V AC/Minute
Insulation Resistance:1000Megohm Min
Operation Temperature:-40℃ to +105℃

Housing Material:PA9T+33%GF Black(UL94V-0)
Contact Material:Brass
Contact plating:Au or Sn over Ni Plating

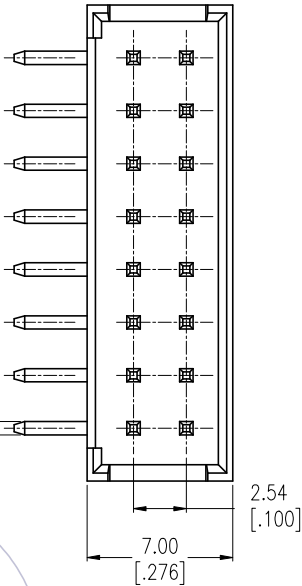

RECOMMENDED PCB LAYOUT
TOLERANCE IS ±0.05

Specification & Ordering Information

Circuit	Part No.	Dimension	
		A	B
2*3Pin	WF2548-2WR03X01	10.16	5.08
2*4Pin	WF2548-2WR04X01	12.70	7.62
2*5Pin	WF2548-2WR05X01	15.24	10.16
2*6Pin	WF2548-2WR06X01	17.78	12.70
2*7Pin	WF2548-2WR07X01	20.32	15.24
2*8Pin	WF2548-2WR08X01	22.86	17.78
2*9Pin	WF2548-2WR09X01	25.40	20.32
2*10Pin	WF2548-2WR10X01	27.94	22.86
2*11Pin	WF2548-2WR11X01	30.48	25.40
2*12Pin	WF2548-2WR12X01	33.02	27.94
2*13Pin	WF2548-2WR13X01	35.56	30.48
2*14Pin	WF2548-2WR14X01	38.10	33.02
2*15Pin	WF2548-2WR15X01	40.64	35.56
2*16Pin	WF2548-2WR16X01	43.18	38.10
2*17Pin	WF2548-2WR17X01	45.72	40.64
2*18Pin	WF2548-2WR18X01	48.26	43.18
2*19Pin	WF2548-2WR19X01	50.80	45.72
2*20Pin	WF2548-2WR20X01	53.34	48.26
2*21Pin	WF2548-2WR21X01	55.88	50.80
2*22Pin	WF2548-2WR22X01	58.42	53.34


Ordering Information

WF2548 -2 WR XX X 0 1

Contact Plating
S0=Gold Flash/Tin
S3=10u"Gold/Tin
S4=15u"Gold/Tin
S5=30u"Gold/Tin
G0=Gold Flash
G3=10u"Goid
G4=15u"Goid
G5=30u"Goid
Blank=Tin

Color
B:Black

Packing:
0=PE Bag
T=Tube

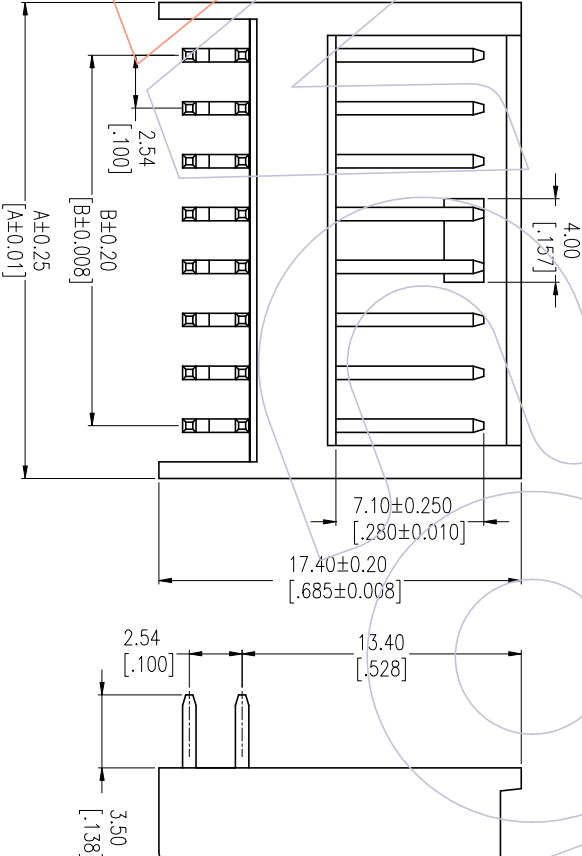

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE		PART NO.	TITLE:	Customer NO.
				X.X	±0.40			UNIT	1:1			
A1	2022.04.22	Add Part No.		X.XX	±0.25	CHECK	2022.04.22	mm	A4	WF2548-2WRXXXB01		
A0	2013.08.07	NEW	LKP	X.XXX	±0.15			SHEET	1/1		2.54mm DUAL ROW 90°DIP WAFER	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	APPROVE	DATE	PROJ.				
1				DM	TOL							
2												
3												
4												
5												
6												
7												
8												
9												
10												



Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com