

HSF



NOTES:

Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to +105℃

Insulator Material:PA66 (UL94−V0)



Use with:WF2549−T

Mated With:WF2549−Wafer

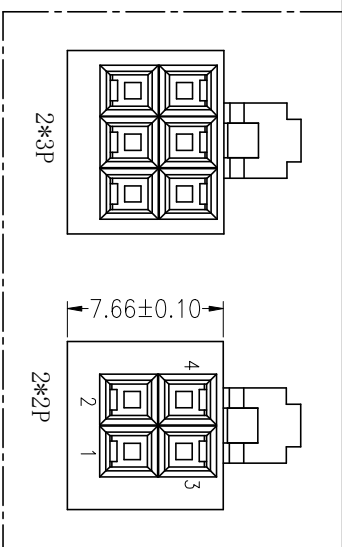

Ordering Information

WF2549- 2 H XX X 0 1
[.100±0.004] [1.100±0.004]
Section A-A
No of Pins per Row: 02-25P
Colour W=White
Packing 0=PE Bag
B=BLACK

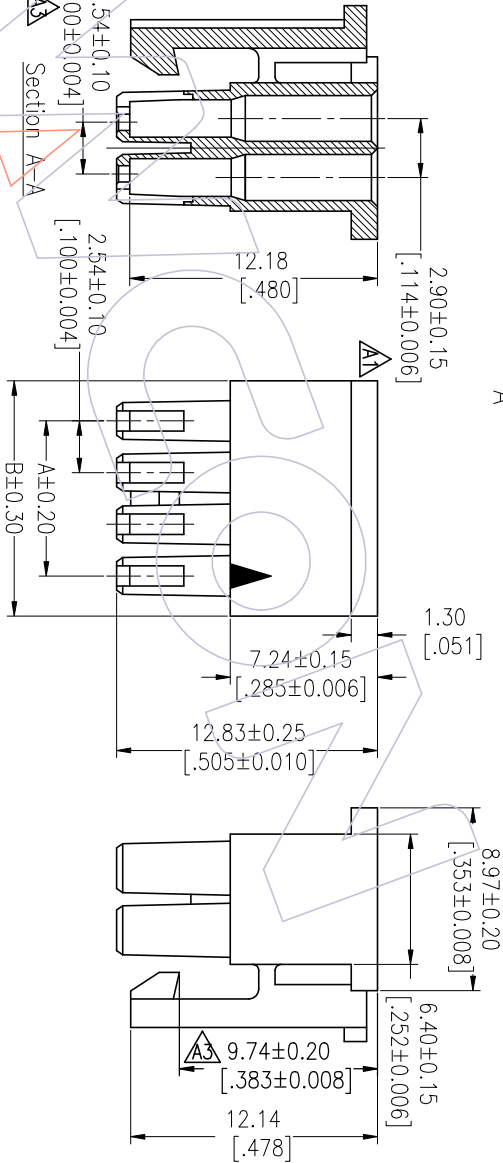

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
2x02	WF2549-2H02X01	2.54	8.26
2x03	WF2549-2H03X01	5.08	9.02
2x04	WF2549-2H04X01	7.62	11.56
2x05	WF2549-2H05X01	10.16	14.10
2x06	WF2549-2H06X01	12.70	16.64
2x07	WF2549-2H07X01	15.24	19.18
2x08	WF2549-2H08X01	17.78	21.72
2x09	WF2549-2H09X01	20.32	24.26
2x10	WF2549-2H10X01	22.86	26.80
2x11	WF2549-2H11X01	25.40	29.34
2x12	WF2549-2H12X01	27.94	31.88
2x13	WF2549-2H13X01	30.48	34.42
2x14	WF2549-2H14X01	33.02	36.96
2x15	WF2549-2H15X01	35.56	39.50
2x16	WF2549-2H16X01	38.10	42.04
2x17	WF2549-2H17X01	40.64	44.58
2x18	WF2549-2H18X01	43.18	47.12
2x19	WF2549-2H19X01	45.72	49.66
2x20	WF2549-2H20X01	48.26	52.20
2x21	WF2549-2H21X01	50.80	54.74
2x22	WF2549-2H22X01	53.34	57.28
2x23	WF2549-2H23X01	55.88	59.82
2x24	WF2549-2H24X01	58.42	62.36
2x25	WF2549-2H25X01	60.96	64.90

A4	2018/02/09	ADD THE COLOR	—	OPERATION	—	DRAW	—	DATE	—	SCALE	—	FIT	—	PART NO.	—
A3	2016/07/27	MODIFY DRAWING	—	X.X	±0.40	Dwg	—	2018/02/09	—	UNIT	mm	1/1	—	SEE TAB	—
A2	2013/05/10	ADD 2*03PIN ,2*02PIN DRAWING	—	X.XX	±0.25	CHECK	—	DATE	—	SIZE	A4	1/1	—	2.54mm HOUSING	—
AO	2012/09/10	NEW	—	X.XXX	±0.15	—	—	DATE	—	SHEET	1/1	1/1	—	Customer NO.	—
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIW	TOL	APPROVE	DATE	PROJ.	—	—	—	—	—	—	—



WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com