

HSF

NOTES:

1. Current Rating: 3.0A ;
2. Voltage Rating: 250V/AC ;
3. Contact Resistance: 20mΩ Max;
4. Withstand Voltage: 800V/AC;
5. Insulation Resistance: 1000MΩ (DC/500V);
6. Operating Temperature: -40℃ to +105℃;
7. Insulator Material: PPA, UL94V-0, NAT;
8. Contact Material: Copper Alloy;
9. Contact plating:
80 μ" TIN on solder area,
50 μ" Nickel underplating overall;
10. Recommended process:
Wave soldering, Peak temperature: 260±5℃, 5s;

Ordering Information:

WF2013- 2 WR H XX T T 1

Dual Row

WR: 90° DIP TYPE






Insulator Material
H=PPA

No. of Pins
05~20 (see table)

Colour T=NATURAL




Package T: Tube

WCON internal code

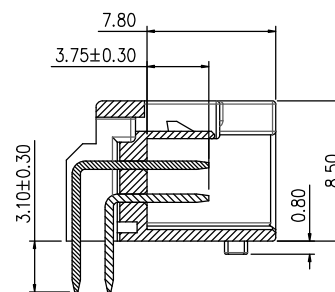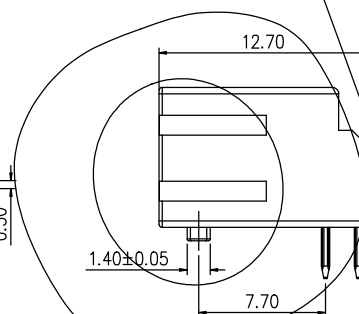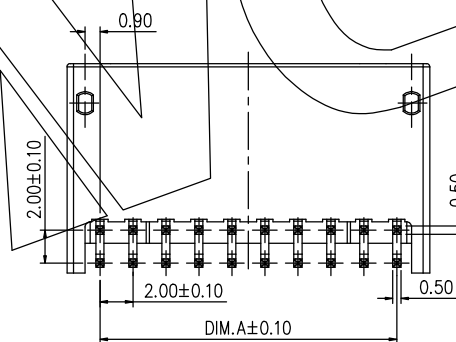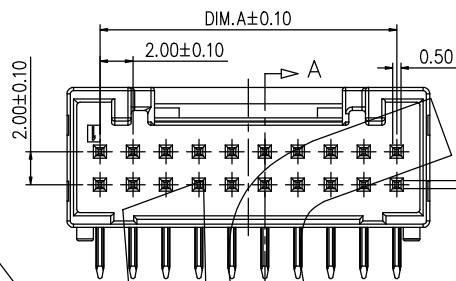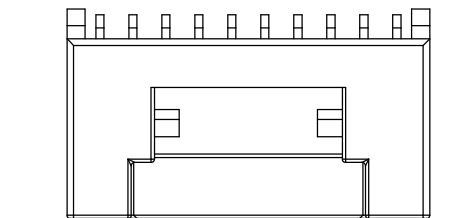

SEC A-A

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)






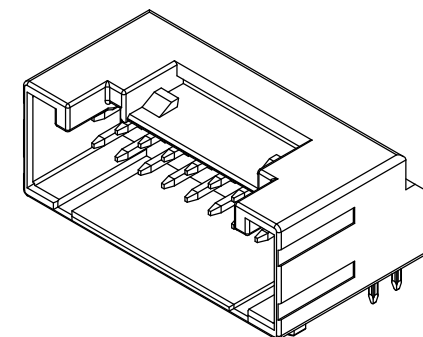
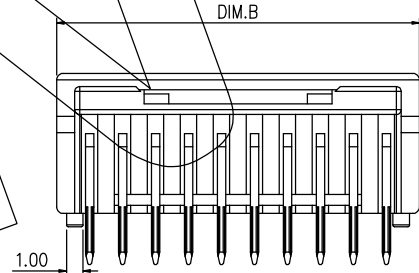
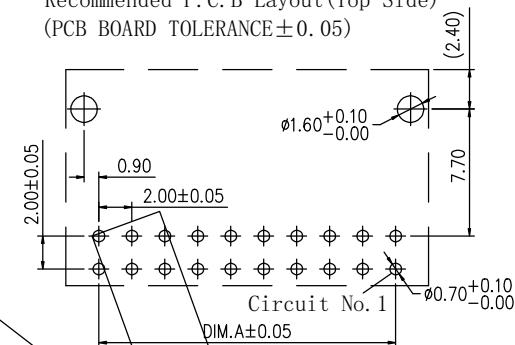


				OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	WCON	
				X.X	±0.30							
				X.XX	±0.25	CHECK	DATE	UNIT	mm	TITLE:	Http: www.wcon.com	
				X.XXX	±0.15							
				Angle	±3°	APPROVE	DATE	SHEET	1/2	Customer NO.	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	
				DIM	TOL						WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE				PROJ.				
A0	2023/01/10	NEW		---								

HSF

TABLE:

PART. NO	CKTS	DIM. A	DIM. B
WF2013-2WRH04TT1	2*4PIN	6.00	10.00
WF2013-2WRH05TT1	2*5PIN	8.00	12.00
WF2013-2WRH06TT1	2*6PIN	10.00	14.00
WF2013-2WRH07TT1	2*7PIN	12.00	16.00
WF2013-2WRH08TT1	2*8PIN	14.00	18.00
WF2013-2WRH09TT1	2*9PIN	16.00	20.00
WF2013-2WRH10TT1	2*10PIN	18.00	22.00
WF2013-2WRH11TT1	2*11PIN	20.00	24.00
WF2013-2WRH12TT1	2*12PIN	22.00	26.00
WF2013-2WRH13TT1	2*13PIN	24.00	28.00
WF2013-2WRH14TT1	2*14PIN	26.00	30.00
WF2013-2WRH15TT1	2*15PIN	28.00	32.00
WF2013-2WRH16TT1	2*16PIN	30.00	34.00
WF2013-2WRH17TT1	2*17PIN	32.00	36.00
WF2013-2WRH18TT1	2*18PIN	34.00	38.00
WF2013-2WRH19TT1	2*19PIN	36.00	40.00
WF2013-2WRH20TT1	2*20PIN	38.00	42.00

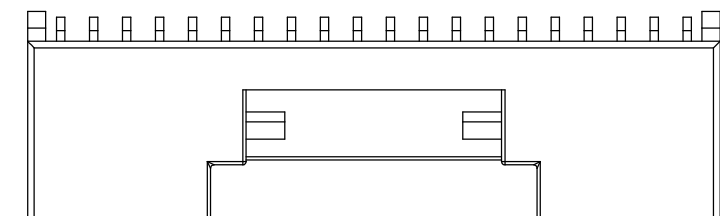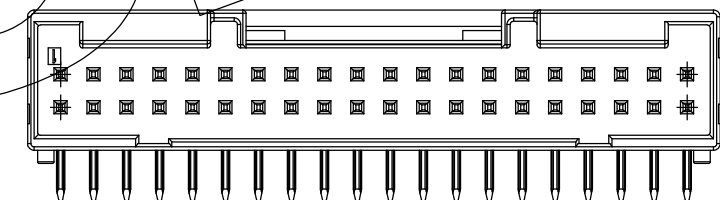

2*4~2*5PIN

2*6~2*7PIN

2*8~2*9PIN

2*10~2*20PIN

				OPERATION		DRAW	DATE	SCALE	FIT	PART NO.	WCON	
				X.X	±0.30							
				X.XX	±0.25	CHECK	DATE	UNIT	mm	TITLE:	Http: www.wcon.com	
				X.XXX	±0.15							
A0	2023/01/10	NEW	---	Angle	±3°	APPROVE	DATE	SHEET	2/2	2.0mm WAFER J Type, Dual Row R/A Dip Type W/T Post	WCON-Dongguan Tel:+86 769 85358920 Fax:+86 769 85358915 E-mail:sales@wcon.com	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							
								PROJ.		Customer NO.	WCON-Kunshan Tel:+86 512 57468408 Fax:+86 512 57468468 E-mail:sales@wcon.com	